


movements that make the difference



The strong, compact gear head is equipped with a total of six spindles, mounted in pairs, rotating alternately clockwise and counter-clockwise.

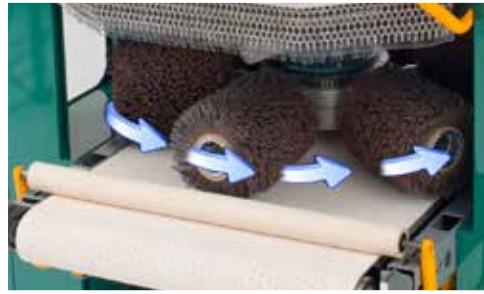

The gearing of the spindles vary between the pairs to ensure uniform finishing of all faces on the parts and uniform wear on the finishing tools.



During the process, the entire head and the six spindles rotate and oscillate across the surface of the parts, which means that the processing of the surface is applied from every possible direction, no matter how the part is placed on the conveyor belt.



The movements are two by two synchronized to each other.

It makes the operation of the machine easy: The operator only has to set the speed of the brushes and the speed of the conveyor.

the central gear head



The central head carrying the tools is an extremely strong and compact unit. The gear head is mounted in an ingenious, unique scissor-type suspension system.

The strong design allows transmission of high torque values through the 6 conical spindles.

Energy saving system



As an option a device is offered which will reduce power consumption with up to 30%.

It reduces the time where the machine is running empty and prevents unnecessary wear of the tools and transport belt.

Tool options

The conical spindles on the main gear head allow the use of different spindle types and thereby different types of tools.

The most common and universal tools are the abrasive cylinders.

They are made by a combination of:

Diameter :150, 250, 300, 350 or 400 mm.

Grit size: P100, P150, P180, P220 or P320.

Density of abrasives: Standard: 7, 9 or 11 mm.

lock-it™ spindles and tools

All machines are equipped with lock-it™ spindles either Ø100 or Ø200 mm mounted on the gear head's conical spindles.

lock-it™ spindles keep tools balanced, offer a perfect fixation and make the change of tools easier and faster.



The tools being used are abrasive brushes in different size and density. Other kind of tools (for metal) - see the back of the brochure.



Special tools for metal

Removal of oxides on the edges:

Spring threaded cylinders knocking the oxides off the edges:



Removal of slags on the surface after plasma cutting:

Heavy duty tool that knocks off the large burrs on the edges.



Manufacturer

Fladder Danmark A/S is established by Hansen & Hundebøl who in the 1970's started a development centre designing unique methods and finishing machines for the wood and metal industry.

Today FLADDER® is a known and acknowledged trade mark of high quality. The target is designing, producing and marketing efficient machines and tools able to meet specific work processes in an effective and reliable way.

Fladder Danmark A/S

Groedevej 14 Phone: +45 75297133
DK-6823 Ansager Fax: +45 75297143
Denmark E-mail: fladder@fladder.dk


www.fladder.com



Fladder® GYRO

automatic machines
for brush finish,
deburring and
denibbing

Fladder® 200/GYRO

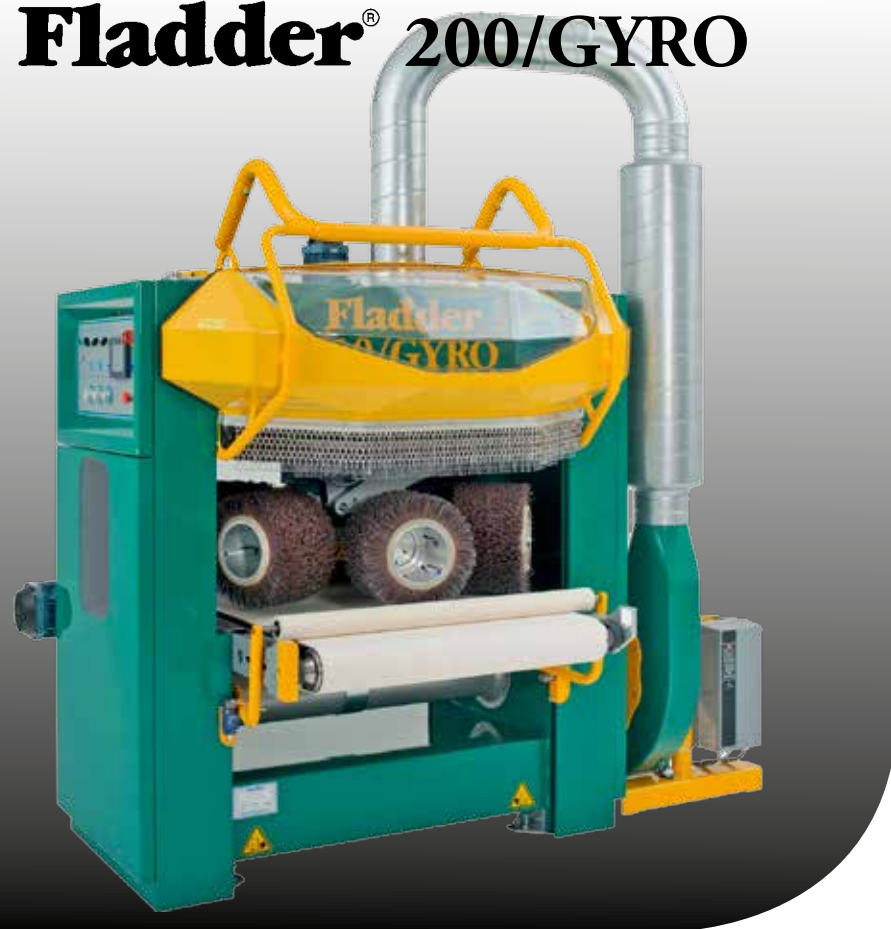

a powerful and efficient machine concept

Fladder® 300/GYRO



Fladder® 400/GYRO



The machines are a result of intensive, targeted product development, creating a design which is able to meet all manufacturers' requirements for durability, efficiency and ease of operation.

Emphasis are made to make the machine as strong and compact as possible.

Simplicity is another keyword: Few but strong components, easy to operate, settings are simple etc.

Fladder® 300/GYRO top - bottom



Operation

The machine is highly user-friendly with symbols and touchscreen that makes it easy and clear for the operator to manage the functions of the machine.



Shields

When opened the large shields offer perfect access for maintenance and tool change. When closed the windows give the operator perfect conditions for monitoring the process.



As a safety precaution the machine will stop when the shields are opened.

The shields are equipped with various curtains, brushes, antistatic brushes and chains for safety reasons and to suppress noise.

Conveyor belt

The conveyor belt is a component of highest quality.

The belt is endless with no seams and consists of several layers of synthetic fibre material covered by a layer of natural rubber for improved friction properties.



The drive shaft is convex shaped. This ensures accurate tracking of the belt throughout its life cycle.

Vacuum system

A special designed vacuum turbine with optimized air flow is used to hold even small parts through the process.



Technical specifications

	200/GYRO	300/GYRO	300/GYRO TB	400/GYRO
Total height	2135 mm	2210 mm	4143 mm	2400 mm
Machine width	1800 mm	2300 mm	2300 mm	2300 mm
Total length	1690 mm	2070 mm	3843 mm	2430 mm
Working height	840 mm	850 mm	848 mm	865 mm
Working width, max.	1000 - 1200 mm	1300 - 1600 mm	1300 mm	1300 - 1600 mm
Vacuum belt	1000 mm	1300 mm	1300 mm	1300 mm
Max. work piece height	100 mm	100 mm	100 mm	
Infeed speed	0.3 - 10.0 m/min	0.3 - 10.0 m/min	0.3 - 10.0 m/min	0.3 - 10.0 m/min
Spindles lock-it™	6 x Ø100x350 mm 6 x Ø200x250 mm	6 x Ø100x350 mm 6 x Ø200x250 mm	6 x Ø100x350 mm 6 x Ø200x350 mm	6 x Ø100x350 mm 6 x Ø200x350 mm
Voltage	3 x 400/500V 50/60Hz	3 x 400/500V 50/60Hz	3 x 400/500V 50/60Hz	3 x 400/500V 50/60Hz
Max./min. fuse	63A/32A	63A/50A	63A/63A	2 x 63A/50A
Max. power use	17.5 - 21 kW	21 kW	33 kW	50 kW
Net weight	1500 kg	2300 kg	3000 kg	2 x 2348 kgs
Dust collecting	3500 m3/h, 500 PA	5000 m3/h, 500 PA	5000 m3/h, 500 PA	2 x 5000 m3/h, 500PA