


**DOOSAN**



# **NX 5500 II**

High-Precision, High-Speed Vertical  
Machining Center

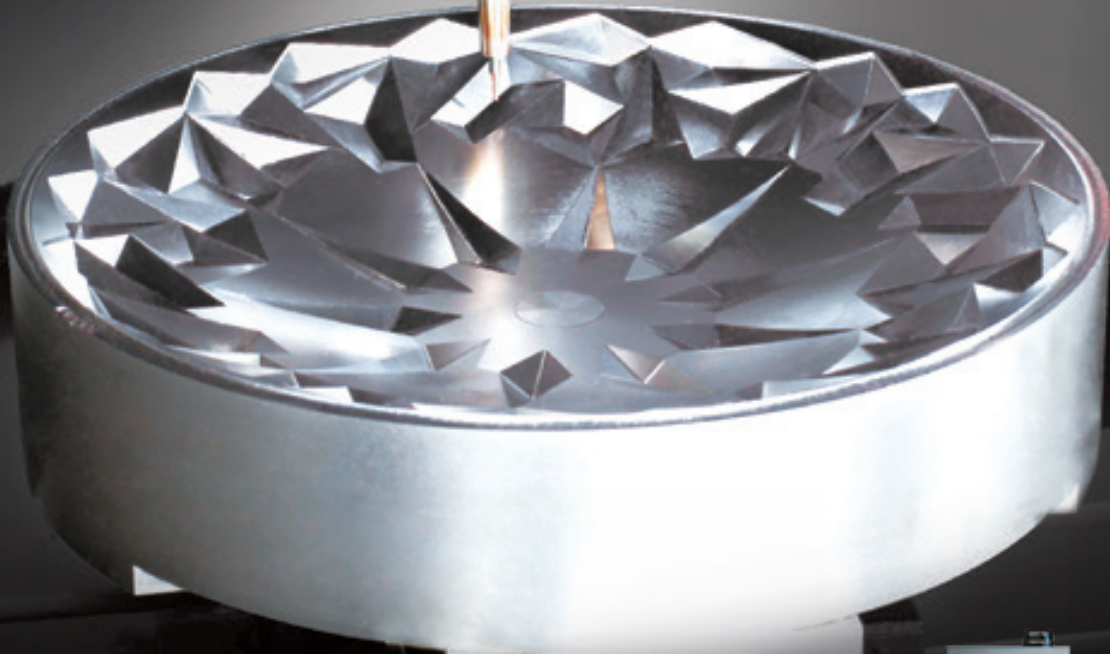

**MACHINE  
GREATNESS™**

**Basic Information**

Basic Structure  
Cutting  
Performance

**Detailed Information**

Optimized Tool  
Processing Solution  
Options  
Capacity Diagram  
Specifications

**Customer Support Service**



# NX 5500 II

The NX 5500 II vertical machining centers are designed with a thermal-symmetric bridge type structure to optimise precision and workpiece quality. High accuracy is also enhanced by the constant pre-load high speed spindle. Operator convenience is improved by optimum accessibility and operator functions.

## Contents

### 02 Product Overview

#### Basic Information

#### 04 Basic Structure

#### 07 Cutting Performance

#### Detailed Information

#### 08 Optimized Tool Processing Solution

#### 09 Standard / Optional Specifications


#### 14 Capacity Diagram

#### 18 Machine / NC Unit Specifications

### 22 Customer Support Service

#### Improved Spindle Rigidity and Life

Improved spindle rigidity in low speed range and achieved long spindle life with constant pre-load spindle in high speed range.

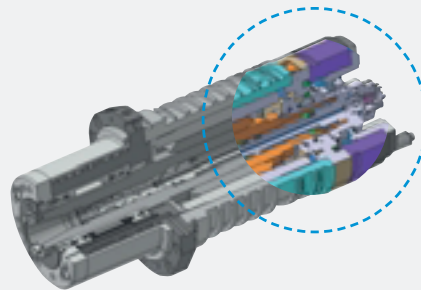


#### Stable bridge type structure

Thermal analysis of the symmetrical structure and minimal overhang of the bridge type machine structure provide optimal solution for high-speed / high-precision processing.



#### Optimized Mold Processing Solution


Thermal error compensation system, high speed spindle, high accuracy contour control, tool measurement system are provided as standard to improve mold processing performance.



#### Sample work




Cellular phone



Pocket



Pet Bottle



Door Knob




## Basic Structure

NX II series have the Bridge type structure for high-performance, high-accuracy machining.


### Bridge Type Structure

Thermal analysis of the symmetrical structure proves that this is the optimal solution for high precision machining of mild products.

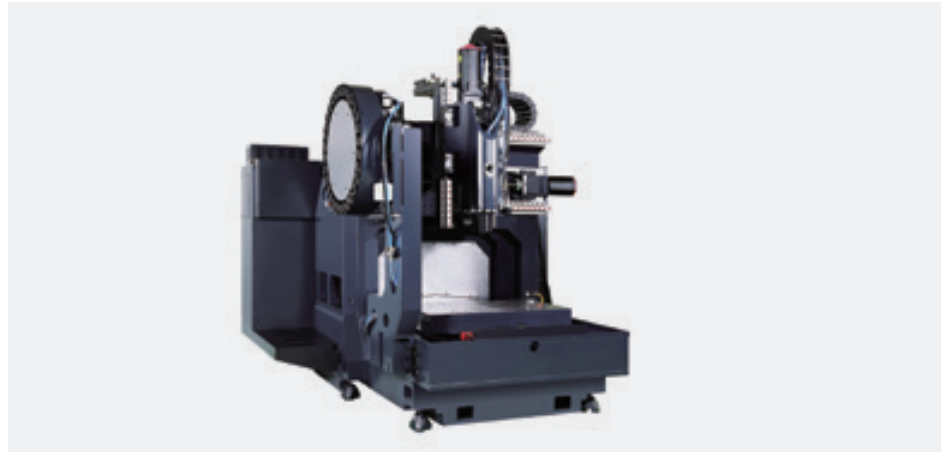


### Gravity Center Drive Structure

By minimizing the distance between gravity center and the feed drive center, the inertia movement is reduced allowing for faster feed rates and a more precise part.

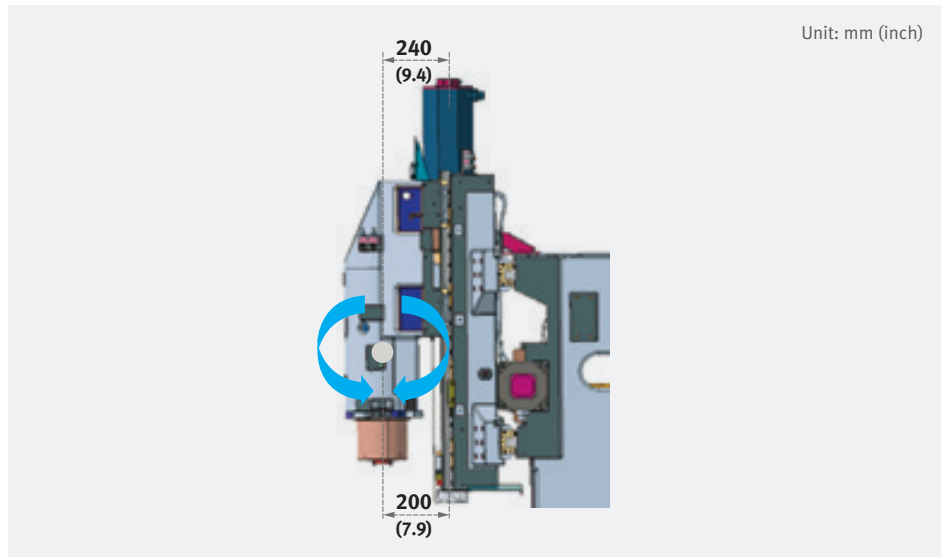

### Oil Separator (NX 5500 II)

Coolant and sliding oil are separated in the bed structure.

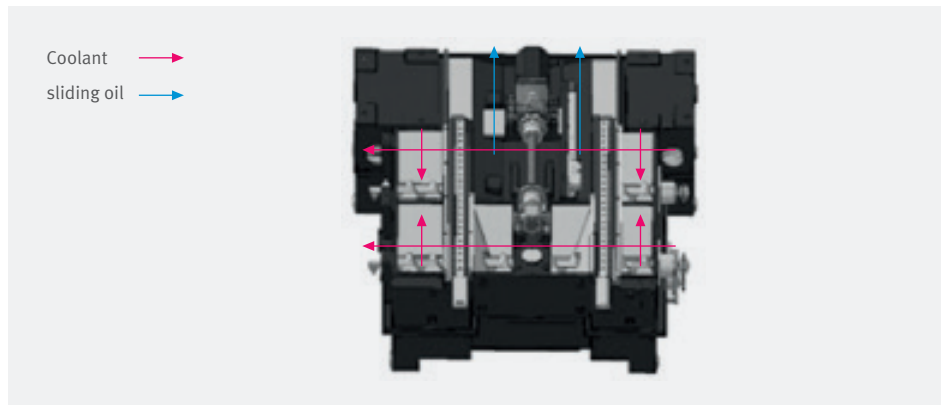


## Feed Shaft

The linear axes are equipped with roller linear Guideways for increased rigidity and a cooling system as standard features to minimize thermal error.


### High-precision Travel System

Roller-type linear Guideways, high-rigidity coupling, and nut cooling system achieve high rigidity and outstanding linear axis accuracy of linear feed drive system.

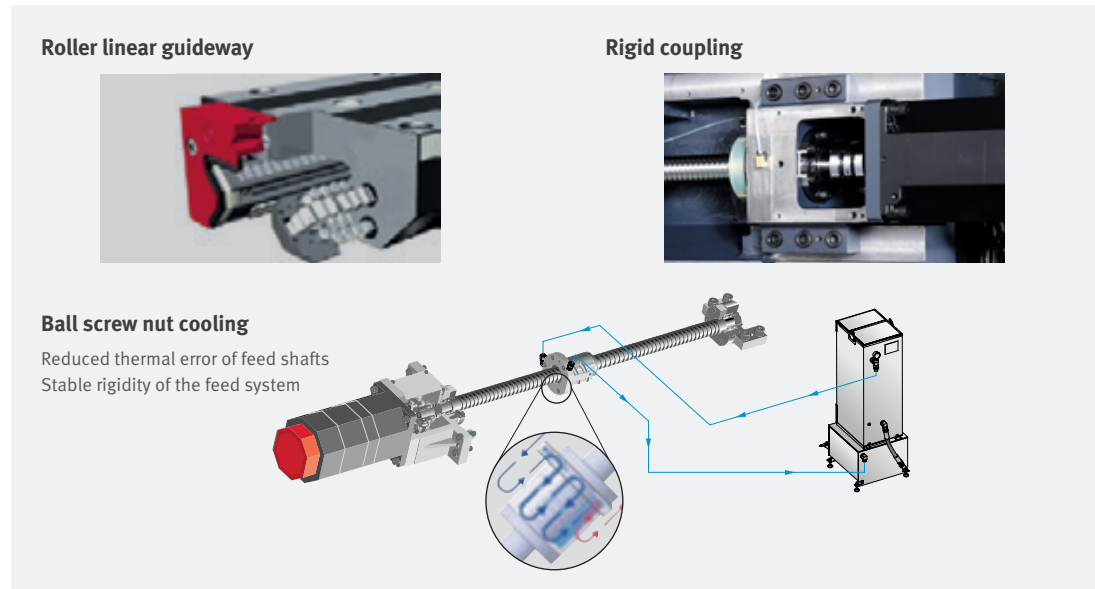

### High Power Servo Motor

The responsiveness of each axis feed system is improved by reducing the load / motor inertia ratio by 50%.

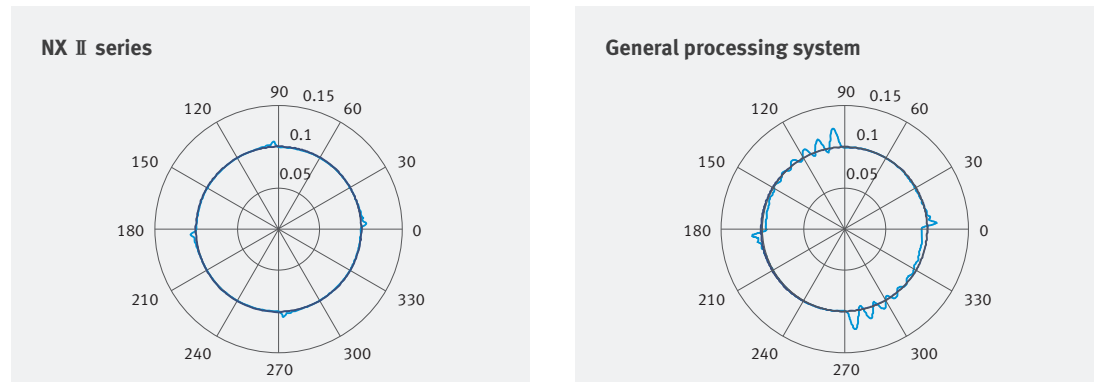


## Tool Changer

Rapid tool change reduce idling time and improves productivity.

### Automatic Tool Changer

Enhanced productivity achieved with the high speed tool changer.

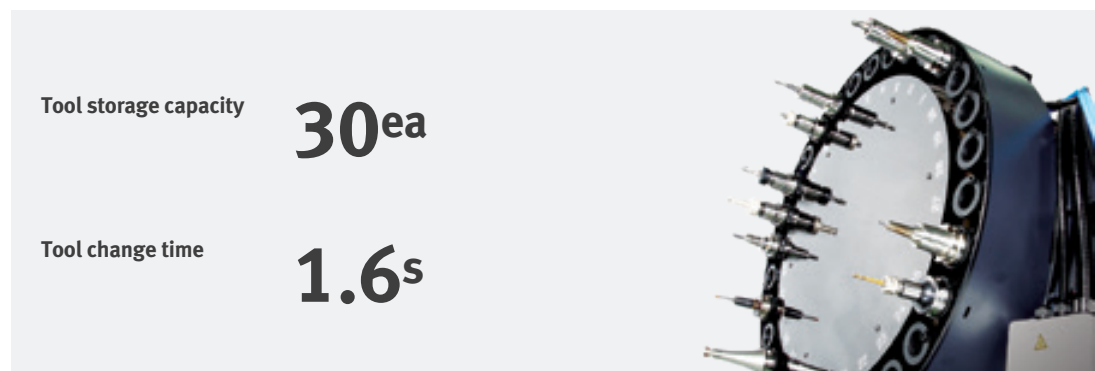

Product Overview

Basic Information

- Basic Structure
- Cutting
- Performance

Detailed Information

- Optimized Tool Processing Solution
- Options
- Capacity Diagram
- Specifications


Customer Support Service

## Table

Wide cutting area for cutting various workpieces.

### Wide Cutting Area

The size and load capacity of the table allow the setting up and cutting of larger workpieces of various shapes.

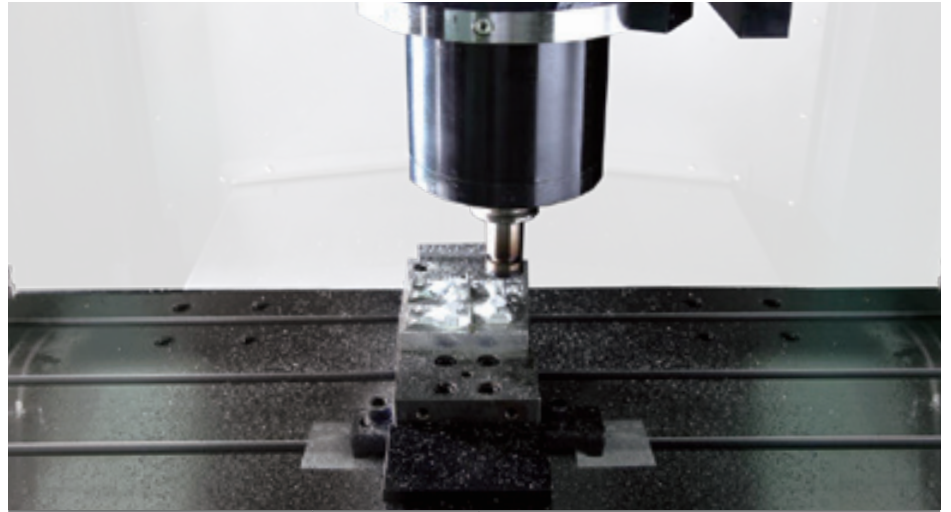

Item	Unit	NX 5500 II
Table size	mm (inch)	1000 x 550 (39.4 x 21.7)
Table loading capacity	kg (lb)	700 (1543)

## Spindle

High-precision spindle and excellent dynamic balancing ensures stable surface accuracy by minimizing vibration in high speed cutting.

### High-rigidity, High-precision Spindle

Adopting a new constant preloading structure, improved spindle rigidity in low speed range and achieved long spindle life.

Max. spindle speed

# 20000r/min

30000 / 40000 r/min Option

Spindle motor power

# 22 / 11kW (30 / 15 Hp)


### Spindle Type and Tool Specification

High speed spindle up to 40000 r/min can be selected according to the workpieces material and cutting conditions. Dual-contact spindle can be selected to improve surface roughness and extend tool life by firm mounting of the tools on the spindle.

Item	Unit	20000 r/min		30000 r/min	40000 r/min
		std.	opt.	option	option
Spindle motor power	kW (Hp)	22 / 11 (30 / 15)	22 / 11 (30 / 15)	18.5 / 13 (25 / 17)	5.5 / 3.7 (7 / 5)
Taper spindle	-	ISO#40	HSK-A63	HSK-F63	HSK-E40

### Spindle Cooling System

Cooling system removes heat generated at the bearings and motor to minimize thermal error. The air-oil structure supplies high pressure air and lubricant to the spindle bearings to remove the heat generated at the bearings and extend service life of the machine tool.

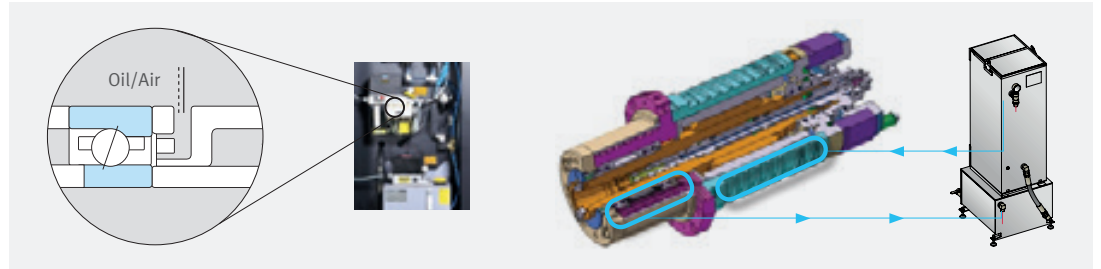

### Cutting Performance

Delivers an excellent performance in diverse machining conditions.

### Z Axis Fine Feeding

Machine	NX 5500 II	
Item	Pattern mold	
Material	HP4M	
Condition	Tool	F1 Ball Endmill
	Spindle speed / Feed rate	Speed : 19000 r/min Feed : 800mm/min (31.5 ipm)
	Time	134 hr

### NX 5500 II [20000 r/min]

<b>Face mill (SM45C)</b>			
Ø80mm (3.1 inch) Face mill (6Z)			
<b>Machining removal rate</b> cm <sup>3</sup> /min (inch <sup>3</sup> /min)	<b>Spindle speed</b> (r/min)	<b>Feed rate</b> mm/min (ipm)	
292 (17.8)	1750	3045 (155)	
<b>R Cutter (NAK80)</b>			
Ø50mm (2.0 inch) R cutter (3Z)			
<b>Machining removal rate</b> cm <sup>3</sup> /min (inch <sup>3</sup> /min)	<b>Spindle speed</b> (r/min)	<b>Feed rate</b> mm/min (ipm)	
115 (7)	1270	2290 (90)	
<b>Face mill (GC25)</b>			
Ø80mm (3.1 inch) Face mill (6Z)			
<b>Machining removal rate</b> cm <sup>3</sup> /min (inch <sup>3</sup> /min)	<b>Spindle speed</b> (r/min)	<b>Feed rate</b> mm/min (ipm)	
436 (26.6)	1750	2730 (107)	
<b>R Cutter (NAK80)</b>			
Ø50mm (2.0 inch) R cutter (3Z)			
<b>Machining removal rate</b> cm <sup>3</sup> /min (inch <sup>3</sup> /min)	<b>Spindle speed</b> (r/min)	<b>Feed rate</b> mm/min (ipm)	
101 (6.2)	960	1150 (45)	


\* The results, indicated in this catalogue are provides as example. They may not be obtained due to differences in cutting conditions and environmental conditions during measurement.

## Optimized Tool Processing Solution

Superior surface finishes and machining accuracy are achieved through using standard processing solutions such as high-speed / high-precision contour control and thermal displacement compensation.


### DSQ High Speed / High Precision Contour Control

\* DSQ : Doosan Super Quality

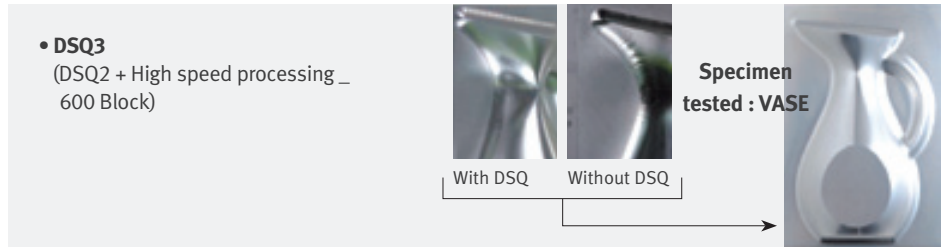


### DAFC The Optimal Feed Control (DAFC\*)

\* DAFC : Doosan Adaptive Feedrate Control

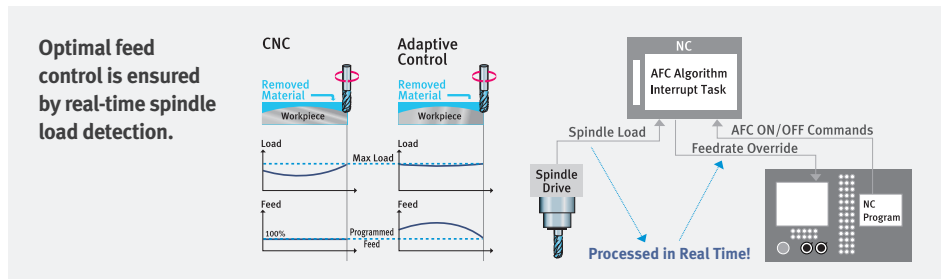

### DTMM Tool Load Monitoring System (DTMM\*) option

\* DTMM : Doosan Tool load Monitoring for Machining Centers

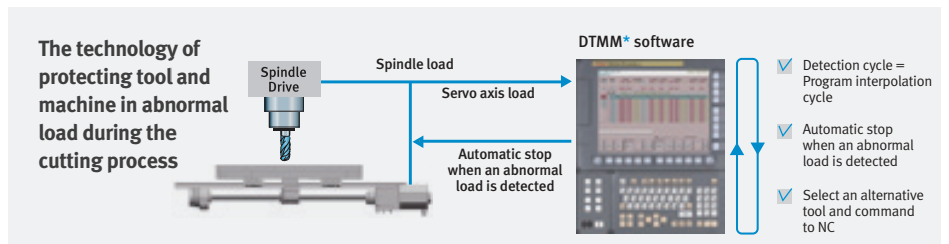

### DSTC Smart thermal displacement multi compensation technology (DSTC\*)

\* DSTC : Doosan Smart Thermal Control


Realizes high-quality, high-precision machining with smoothing thermal displacement compensation of the spindle and structure.

#### Compensation of static displacement of spindle

Compensates changes in tool position caused by expansion of the spindle shaft at high speed.

#### Structure thermal displacement compensation

Compensates irregular deflection or expansion of the structure due to ambient temperature using a multiple temperature sensors.




#### Compensation of structure thermal displacement


Thermal error of the spindle caused by heat accumulation is compensated with 5 algorithms including a smoothing function.



Without smoothing



With smoothing

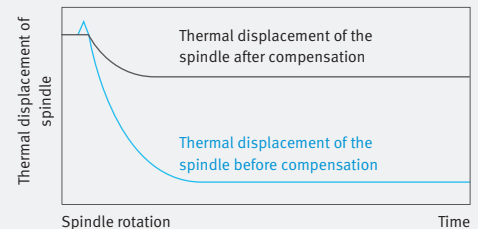





## Standard/Optional Specifications

Diverse optional features are available to meet specific customer requirements.

● Standard ○ Optional X N/A

NO.	Description	Features	NX 5500 II	
1	Air blower		●	
2	Air gun		○	
3	Auto NC power off		○	
4	Auto workpiece measurement		○	
5	Automatic tool changer	24 Tools	X	
6		30 Tools	●	
7	Automatic tool measurement	TS27R : RENISHAW	●	
8		Z-MT : BLUM	○	
9	Automatic tool measurement master tool		○	
10	Chip conveyor	Hinge / Scraper / Drum filter type	○	
11	Coolant chiller		○	
12	Coolant gun		○	
13	Coolant Pump		●	
14	Coolant Tank		●	
15	DAFC		●	
16	DSQ	DSQ3	●	
17	DSTC		●	
18	DTMM		○	
19	Easy Operation Package	Tool load monitor	●	
20		Alram / M-code / G-code / ATC recovery help	●	
21		Table moving for setup / Easy work coordinate setting	●	
22	Electric cabinet air conditioner		○	
23	Electric cabinet light		○	
24	Electric cabinet line filter		○	
25	Gravity axis drop prevention		○	
26	Linear scale	X Axis	○	
27		Y Axis	○	
28		Z Axis	○	
29	MPG	1 MPG_PORTABLE TYPE	●	
30		1 MPG_PORTABLE_W/ENABLE TYPE	○	
31	NC System	FANUC 31iB	●	
32		HEIDENHAIN iTNC530	○	
33	NC system lcd size	10.4 inch_FANUC (Color)	X	
34		15.1 inch_HEIDENHAIN (Color)	●	
35	Oil Skimmer	Belt type	○	
36	Power transformer		○	
37	Spindle motor power	22 / 11 kW (30 / 15 Hp)	●	
38		18.5 / 13 kW (25 / 17 Hp)	○	
39		5.5 / 3.7 kW (7 / 5 Hp)	○	
40	Spindle speed	20000 r/min	●	
41		30000 r/min	○	
42		40000 r/min	○	
43	Test bar		○	
44	Through spindle coolant	NONE	●	
45		1.5 kW (2 Hp)_2.0 MPA (2 Hp)	○	
46		5.5 kW (7.4 Hp)_7.0 MPA_DUAL BAG FILTER	○	
47	Work & tool counter	WORK / TOOL	○	
49	Customized special option	ANCHORING	J-BOLT	
50		COOLANT CHILLER		
51		AUTO TOOL LENGTH MEASUREMENT	MAKER/SPEC._RENISHA/NC4	○
52			MAKER/SPEC._BLUM/MICROCOMPACT LASER CONTROL NT	○
53			MAKER/SPEC._BLUM/Z-MT, Z-NANO HP	○
54		AUTO TOOL BREAKAGE DETECTION	MAKER/SPEC._OMRON / D5A	○
55			MAKER/SPEC._NIDDLE	○
56		4TH AXIS PREPARATION CABLING FOR SERVO/1-PNEUMATIC PIPING	FACTORY READY MADE	○
57		4TH AXIS WITH CNC R.TABLE	AVAILABLE SIZE_Φ 500	○
58			SERVO MOTOR_EPENDS ON THE TABLE	○

\* Please contact Doosan for more information.

Product Overview

Basic Information

Basic Structure  
Cutting  
Performance

Detailed Information

Optimized Tool  
Processing Solution  
Options  
Capacity Diagram  
Specifications

Customer Support Service




## Optional Equipments

Deliver excellent performance on diverse machining conditions.



### 1. Constant pre-load

Constant pressure spindle for high rigidity in low speed range and long life in high speed range.




### 2. Standard chip pan and chip disposal

Chips are discharged to left side via screw conveyor.



### 3. Coolant chiller (strongly recommended)

**option**

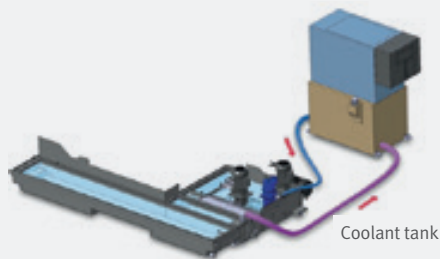

### 4. Machine temperature controlled spindle and axis drive cooling system

Accurate spindle cooling  
Accurate ball screw cooling



### 5. Auto tool measuring equipment

Tool length measurement  
Tool diameter measurement  
Damaged tool detection




### 6. Graphite cutting solution **option**

Fine graphite powder sealing. Wet/dry chip disposal

## Chip Disposal

Through rapid discharge of chips, it maintains a high degree of efficient processing, and supports the operator to work in improved environment by providing a variety of chip treatment devices.

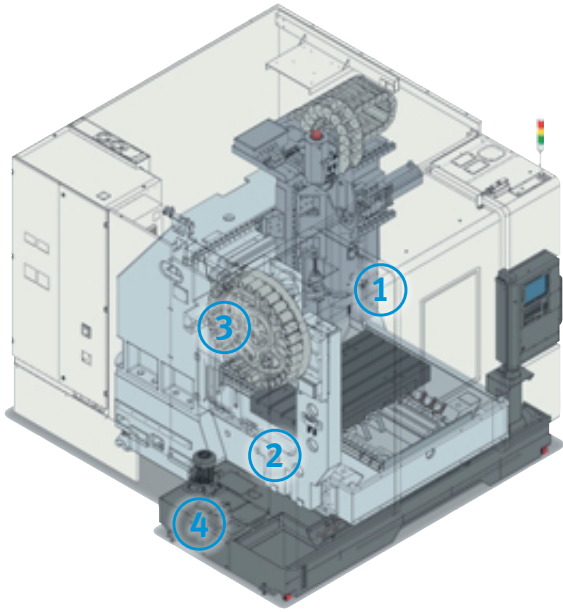


### 1. Coolant system

Side coolant chip air blower. Coolant residue stopping device

Spindle face coolant

**option**



### 2. Screw conveyor

Two-rows screw type.



### 3. Barrier between the magazine and cutting area

The tool storage of the magazine is protected from the cutting area with an automatic door.



### 4. Chip conveyor **option**


NX 5500 II - Rear discharge



Hinge type




Scraper type



Drum filter type

## Coolant Chiller (highly recommended) **option**

The coolant chiller lowers coolant temperature, helping to cool both the workpiece and tool during the machining operation. When using insoluble cutting oils, a coolant chiller is recommended to cool heated oil and preserve machining precision.

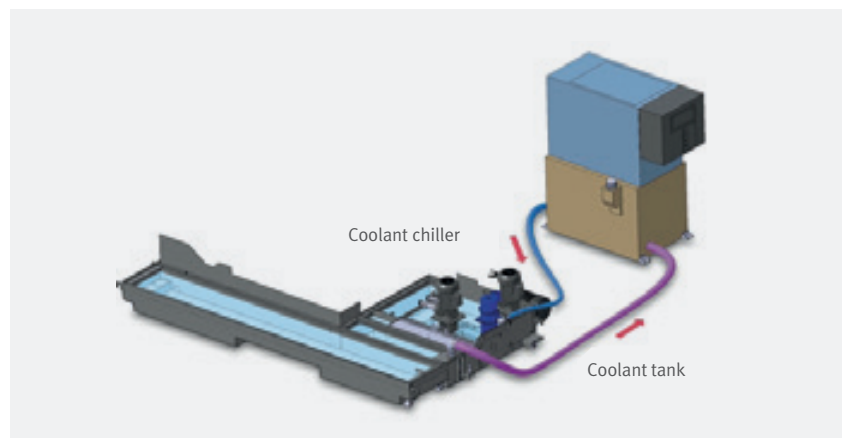



**Convenience**

**Operating console**

**Basic Information**

Basic Structure  
Cutting  
Performance

**Detailed Information**

Optimized Tool  
Processing Solution  
Options  
Capacity Diagram  
Specifications

**Customer Support Service**

Operator convenience and work efficiency have been improved with adoption of various convenient control functions and ergonomic design.



<p><b>1.</b> 15" Color TFT LCD Monitor</p>	<p><b>2.</b> Mono Lever</p>
<p><b>3.</b> Membrane Keyboard</p>	<p><b>4.</b> Portable MPG</p> <p>LCD Portable MPG Handle <i>option</i></p>
<p><b>5.</b> Hot Key</p>	<p><b>6.</b> Swiveling Operation Panel</p> <p>The operation panel can swivel up to 80° improving user convenience.</p>


**Excellent Accessibility**

NX 5500 II	A	mm (inch)	815 (32)
	B	mm (inch)	265 (10)
	C	mm (inch)	860 (34)

**Convenient Absolute Feed**

The current position of the machine is stored and maintained using battery power. Zero point return is not necessary after a power cycle.

**System Condition Indicator**

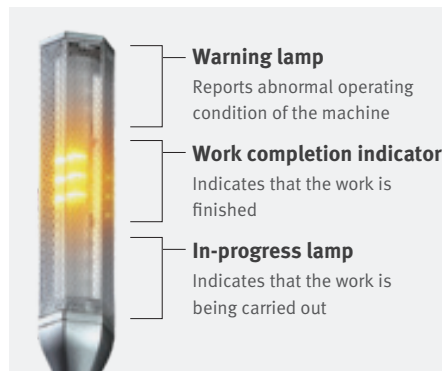

**LED Indoor Work Light**






## Easy Operation Package

These Doosan software packages have been customized to provide fast and easy setup of tooling, workpiece, and program. These functions minimize the idle time caused by process setup and maximize the machine's productivity.

## Operation / Maintenance

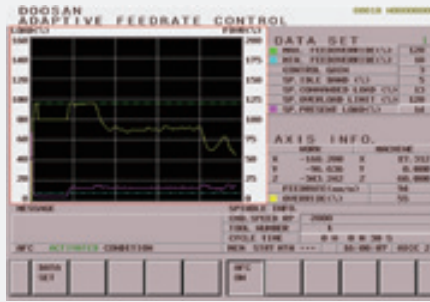

### Adaptive Feed Control (AFC)

Function to control feedrate so that the cutting can be carried out at a constant load (To adapt to the spindle load set up with constant load feedrate control function)



### Tool Load Monitor

Function to automatically monitor tool load (Different loads can be set for one tool according to M700 ~ M704)




### Work Offset Setting

Function to configure various work offset settings



### Sensor Status Monitor

Function to view sensor conditions of the machine

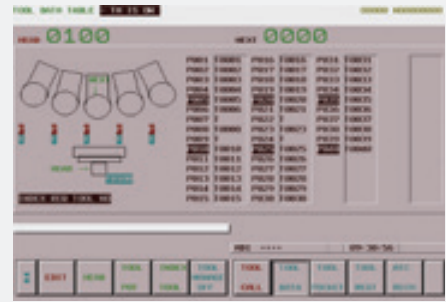

### Tool Management

Function to manage tool information [Tool information / Tool No. / Tool condition (normal, large diameter, worn / damaged, used for the first time, manual) / Tool name]



### Pattern Cycle & Engraving

Function to create frequently-used cutting programs automatically

**Pattern Cycle:** creates a program for a pre-defined shape

**Engraving:** creates a program for cutting a shape described with characters (option) [option](#)



### Alarm Guidance

Function to show detailed info on frequently triggered alarms and recommended actions



### ATC Recovery

Function to view detailed info with recommended actions and to perform step-by-step operation manually (when an alarm is triggered during an ATC operation)

## Spindle Power – Torque Diagram

### Basic Information

Basic Structure  
Cutting  
Performance


### Detailed Information

Optimized Tool  
Processing Solution  
Options  
Capacity Diagram  
Specifications


### Customer Support Service

## NX 5500 II


Max. spindle speed : 20000 r/min  
Spindle motor power : 22 kW (30 Hp)  
Taper : ISO #40

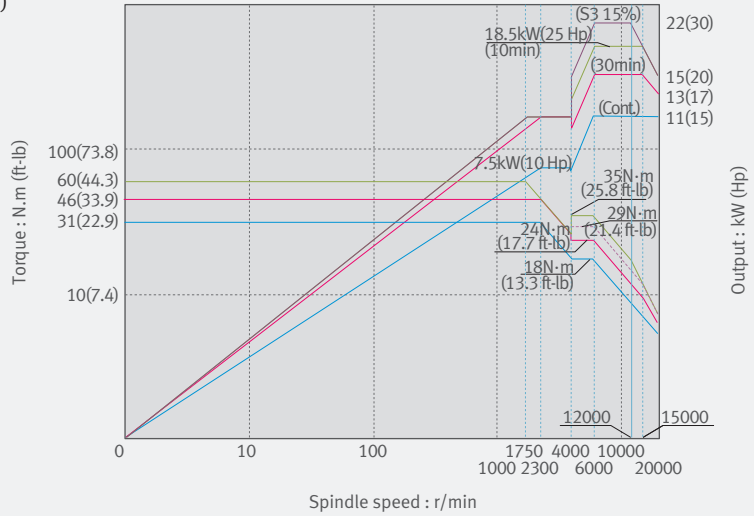

Max. spindle speed : 30000 r/min  
Spindle motor power : 18.5 kW (25 Hp)  
Taper : HSK F63 option

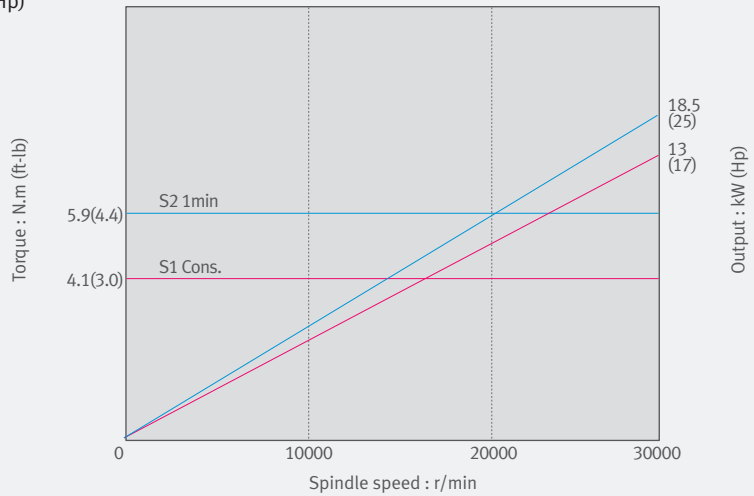

Max. spindle speed : 40000 r/min  
Spindle motor power : 5.5 kW (7 Hp)  
Taper : HSK E40 option

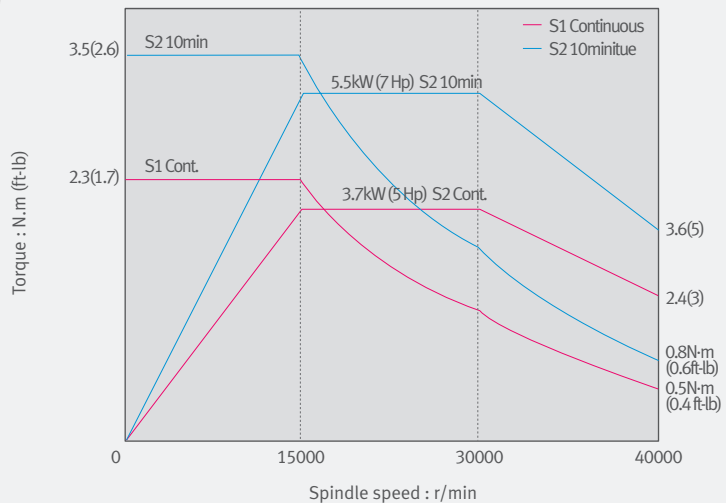


## External Dimensions


### NX 5500 II

Unit: mm (inch)

Top View

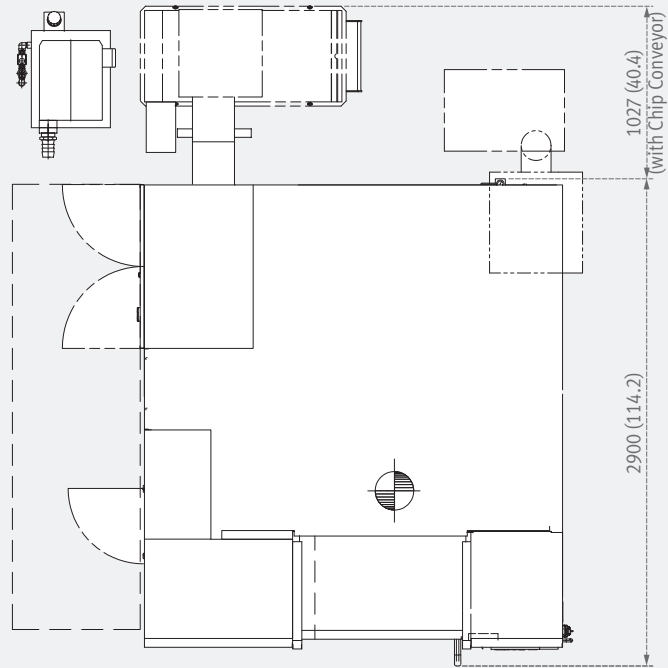

Front View

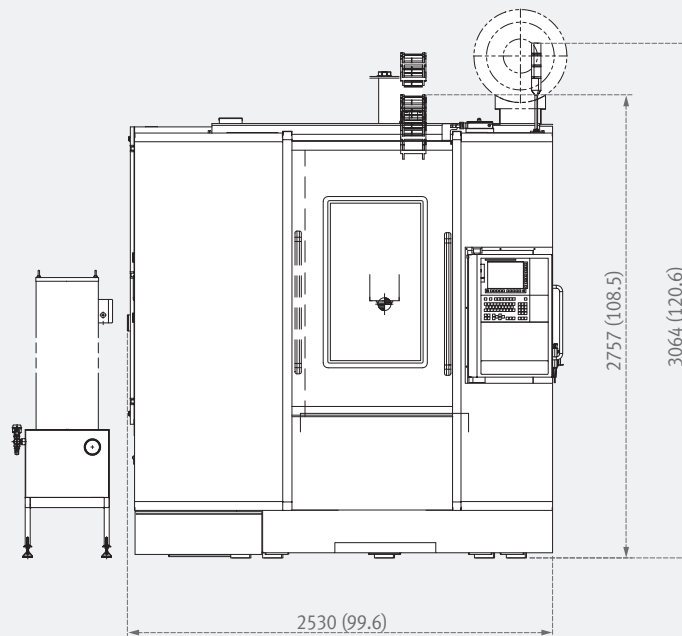

\* Some peripheral equipment can be placed in other places

## External Dimensions

### Basic Information

Basic Structure  
Cutting  
Performance


### Detailed Information

Optimized Tool  
Processing Solution  
Options  
Capacity Diagram  
Specifications

### Customer Support Service

## Table dimensions


Unit: mm (inch)

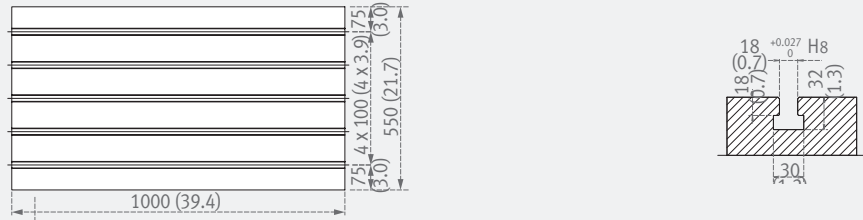


## Tool shank

Unit: mm (inch)

20000 r/min

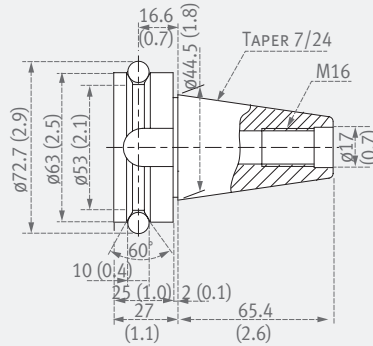


MAS 403 BT40




PS-806 (NIKKEN)


20000 r/min **option**

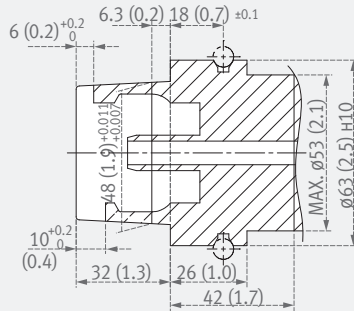

HSK A63




30000 r/min **option**



DIN 69893 HSK-F63


40000 r/min **option**



DIN 69893 HSK-E40



## Machine Specifications



Item		Unit	NX 5500 II
Travels	X, Y, Z axis	mm (inch)	900 / 550 / 500 (35.4 / 21.7 / 19.7)
	Distance from spindle nose to table top	mm (inch)	150 ~ 650 (5.9 ~ 25.6)
Feedrates	Rapid traverse (X / Y / Z axis)	m/min (ipm)	30 / 30 / 30 (1181.1)
	Cutting feedrate	m/min (ipm)	15 (590.6)
Table	Table size	mm (inch)	1000 x 550 (39.4 x 21.7)
	Table loading capacity	Kg (lb)	700 (1543.2)
Spindle	Max. spindle speed	r/min	20000 {30000, 40000}*
	Spindle motor (10min/cont.)	kW (Hp)	22 / 11 (29.5 / 14.8) {18.5 / 13 (24.8 / 17.4), 5.5 / 3.7 (7.4 / 5.0)}*
	Taper spindle	Taper	ISO #40 7/24 {HSK-F63, HSK-E40}*
	Max. spindle torque (10min)	N.m (ft-lbs)	60 (44.3) {5.9, 3.5 (4.3, 2.6)}*
Automatic Tool Changer	Number of tools	ea	30
	Max. tool diameter	mm (inch)	80 (3.1)
	Max. tool diameter without adjacent tools	mm (inch)	125 (4.9)
	Max. tool length	mm (inch)	220 (8.7)
	Max. tool weight	Kg (lb)	7 (15.4)
	Max. tool moment	N-m (ft-lbs)	7.84 (5.8)
	Tool change time (tool-to-tool)	s	1.6
Power Source	Electric power supply	kVA	46.6 {43, 31}*
Tank Capacity	Coolant tank capacity	L (gal)	230 (60.8)
	Lubrication tank capacity	L (gal)	3.0 (0.8)
Machine Dimensions	Length x Width	mm (inch)	2530 x 2900 (99.6 x 114.2)
	Height	mm (inch)	3064 (120.6)
	Weight	Kg (lb)	9000 (19841.3)
NC system		-	FANUC 31i {HEIDENHAIN}*

\* { } : Option

FANUC

## Basic Information

Basic Structure  
Cutting  
Performance

## Detailed Information

Optimized Tool  
Processing Solution  
Options  
Capacity Diagram  
Specifications

## Customer Support Service

No.	Item	Spec.	Fanuc 31i
1	AXES CONTROL	Controlled axes	3 (X, Y, Z)
2		Additional controlled axes	5 axes in total
3		Least command increment	0.001 mm / 0.0001"
4		Interpolation type pitch error compensation	
5	INTERPOLATION & FEED FUNCTION	2nd reference point return	G30
6		3rd / 4th reference return	
7		Inverse time feed	
8		Cylindrical interpolation	G07.1
9		Helical interpolation B	Only Fanuc 30i
10		Smooth interpolation	
11		NURBS interpolation	
12		Involute interpolation	
13		Helical involute interpolation	
14		Bell-type acceleration/deceleration before look ahead interpolation	
15		Automatic corner override	G62
16		Manual handle feed	Max. 3unit
17		Manual handle feed rate	x1, x10, x100 (per pulse)
18		Handle interruption	
19	Manual handle retrace		
20	Manual handle feed 2/3 unit		
21	Nano smoothing	AI contour control II is required.	
22	AI APC	20 BLOCK	
23	AICC I	30 BLOCK	
24		40 BLOCK	
25	AICC II	200 BLOCK	
26		400 BLOCK	
27	High-speed processing	600 BLOCK	
28	Look-ahead blocks expansion	1000 BLOCK	
29	DSQ I	AICC II (200block) + Machining condition selection function	
30	DSQ II	AICC II (200block) + Machining condition selection function + Data server(1GB)	
31	DSQ III	AICC II with high speed processing (600block) + Machining condition selection function + Data server(1GB)	
32	SPINDLE & M-CODE FUNCTION	M- code function	
33		Rigid tapping	

## NC Unit Specifications

● Standard ○ Optional X N/A

FANUC

No.	Item	Spec.	Fanuc 31i	
34	TOOL FUNCTION	64 ea	64 ea	
35		Number of tool offsets	99 ea	○
36			200 ea	○
37			400 ea	○
38			499 / 999 / 2000 ea	○
39			Tool nose radius compensation	G40, G41, G42
40	Tool length compensation	G43, G44, G49	●	
41	Addition of tool pairs for tool life management		○	
42	Tool offset	G45 - G48	○	
43	PROGRAMMING & EDITING FUNCTION	Custom macro	●	
44		Part program storage	256KB (640m)	640m
45			512KB(1,280m)	○
46			1MB(2,560m)	○
47			2MB(5,120m)	○
48			4MB(1,0240m)	○
49			8MB(2,0480m)	○
50		Inch/metric conversion	G20 / G21	●
51		Number of Registered programs	400 ea	-
52			500 ea	500 ea
53			1000 ea	○
54			4000 ea	○
55		Optional block skip	9 BLOCK	○
56		Program number	04-digits	-
57	Playback function		○	
58	Addition of workpiece coordinate system	G54.1 P1 - 48 (48 pairs)	48 pairs	
59		G54.1 P1 - 300 (300 pairs)	○	
60	Tilted working plane indexing command	G68.2	○	
61	Tilted working plane indexing function	Programming TWP command on guidance window	X	
62	OTHERS FUNCTIONS (Operation, setting & Display, etc)	High speed skip function	○	
63		Polar coordinate command	G15 / G16	○
64		Polar coordinate interpolation	G12.1 / G13.1	○
65		Programmable mirror image	G50.1 / G51.1	○
66		Scaling	G50, G51	○
67		Single direction positioning	G60	○
68		Pattern data input		○
69		Jerk control	AI contour control II is required.	○
70		Fast Data server with1GB PCMCIA card		●
71		Fast Ethernet		○
72		3-dimensional coordinate conversion		○
73		3-dimensional tool compensation		○
72		Figure copying	G72.1, G72.2	○
73		Machining time stamp function		○
74		CNC screen display		●
75		CNC screen dual display function		●
76		One touch macro call		○
77		EZ Guide i (Conversational Programming Solution)		○
78	Dynamic graphic display	Machining profile drawing -When the EZ Guide i is used, the Dynamic graphic display cannot application	○	

## HEIDENHAIN

## Basic Information

Basic Structure  
Cutting  
Performance

## Detailed Information

Optimized Tool  
Processing Solution  
Options  
Capacity Diagram  
Specifications

## Customer Support Service

No.	Item	Spec.	TNC 640	
1	Axes	3 axes	X, Y, Z	
2		Controlled axes	4 axes	○
3			5 axes	X
4			6 axes	X
5		Additional controlled axes	6 axes	X
6		Controlled axes	Max. 18 axes in total	○
7		Least command increment	0.0001 mm (0.0001 inch), 0.0001°	●
8		Least input increment	0.0001 mm (0.0001 inch), 0.0001°	●
9		Maximum commandable value	±99999.999mm (±3937 inch)	●
10		Axis feedback control	Double-speed control loops for high-frequency spindles and torque/linear motors	○
11		MDI / DISPLAY unit	15.1 inch TFT color flat panel	●
12			19 inch TFT color flat panel	○
13		Program memory for NC programs	SSDR	21GB
14		Block processing time		0.5 ms
15		Cycle time for path interpolation	CC 61xx	3 ms
16	Commissioning and diagnostics	Encoders	Absolute encoders	
17		Data interfaces	Ethernet interface	●
18		USB interface (USB 2.0)	●	
19	Machine functions	Look-ahead (Intelligent path control by calculating the path speed ahead of time)	Max. 1024 blocks	X
20			Max. 5000 blocks	●
21		HSC filters		●
22		Switching the traverse ranges		●
23	Program input	According to ISO	●	
24		With smarT.NC	X	
25		With smartSelect	●	
26	Position entry	Nominal positions for lines and arcs in Cartesian coordinates	●	
27		Incremental or absolute dimensions	●	
28		Display and entry in mm or inches	●	
29		Display of the handwheel path during machining with handwheel superimpositioning	●	
30	Tool compensation	Paraxial positioning blocks	●	
31		In the working plane and tool length	●	
32		Radius-compensated contour lookahead for up to 99 blocks (M120)	●	
33	Tool table	Three-dimensional tool radius compensation	●	
34		Central storage of tool data	●	
35	User functions	Multiple tool tables with any number of tools	●	
36		Cutting-data table	Calculation of spindle speed and feed rate based on stored tables	X
37		Constant contouring speed	relative to the path of the tool center or to the tool's cutting edge	●
38		Parallel operation	Creation of a program while another program is being run	●
39		Tilting the working plane with Cycle 19		●
40		Tilting the working plane with the PLANE function		●
41		Manual traverse in tool-axis direction	after interruption of program run	●
42		Function TCPM	Retaining the position of tool tip when positioning tilting axes	●
43		Rotary table machining	Programming of cylindrical contours as if in two axes	●
44			Feed rate in distance per minute	●
45		FK free contour programming	for workpieces not dimensioned for NC programming	●
46		Program jumps	Subprograms and program section repeats	●
47			Calling any program as a subprogram	●
48		Program verification graphics	Plan view, view in three planes, 3-D view	●
49	3-D line graphics		X	
	Programming graphics	3-D line graphics	●	

# HEIDENHAIN

No.	Item	Spec.	TNC 640	
50	User functions	Program-run graphics	(plan view, view in three planes, 3-D view) ●	
51		Datum tables	Saving of workpiece-specific datums ●	
52		Preset table	Saving of reference points ●	
53		Freely definable table	after interruption of program run ●	
54		Returning to the contour	With mid-program startup ●	
55			After program interruption (with the GOTO key) ●	
56		Autostart	●	
57		Actual position capture	●	
58		Enhanced file management	●	
59		Context-sensitive help for error messages	●	
60		TNCguide	Browser-based, context-sensitive helpsystem ●	
61		Calculator	●	
62		Entry of text and special characters	●	
63		Comment blocks in NC program	●	
64		"Save As" function	●	
65		Structure blocks in NC program	●	
66		Entry of feed rates	FU (feed per revolution) ●	
67			FZ (tooth feed per revolution) ●	
68			FT (time in seconds for path) X	
69			FMAXT (only for rapid traverse pot: time in seconds for path) X	
70		Dynamic collision monitoring (DCM)	○	
71		Fixture monitoring	X	
72		Processing DXF data	○	
73		Global program settings (GS)	X	
74		Adaptive feed control (AFC)	○	
75		KinematicsOpt	Automatic measurement and optimization of machine kinematics ○	
76		KinematicsComp	Three-dimensional compensation ○	
77		3D-ToolComp	Dynamic 3-D tool radius compensation ○	
78		FUNCTION MODE TURN	Switchover to turning mode ○	
79		FUNCTION MODE MILL	Switchover to milling mode ○	
80		TOOLTURN.TRN	Tool table for turning tools ○	
81		Tool compensation for turning	○	
82		FUNCTION TURNDATA SPIN VCONST ON VC:253	Constant surface speed with optional spindle speed limiting ○	
83		FUNCTION TURNDATA BLANK	Blank-form update during turning ○	
84		GRV AXIAL, GRV RADIAL	Undercut as contour element ○	
85	UDC TYPE	Recess as contour element, types E, F, H, K, U, threads ○		
86	Imbalance monitoring	Cycles for determining and monitoring imbalance ○		
87	Fixed cycles	Working plane	Cycle 19 ●	
88		Cylinder surface	Cycle 27 ●	
89		Cylinder surface slot milling	Cycle 28 ●	
90		Cylinder surface ridge milling	Cycle 29 ●	
91	Touch probe cycles	Calibrating the effective radius on a circular stud	●	
92		Calibrating the effective radius on a sphere	●	
93	Cycles for automatic workpiece inspection	Calibrate TS	X	
94		Calibrate TS length	X	
95		Measure axis shift	X	
96		Save kinematics	○	
97		Measure kinematics	○	
98		Preset compensation	○	
99	Options	Software option 1	○	
100		Rotary table machining	Programming of cylindrical contours as if in two axes	
101			Feed rate in mm/min	
102		Coordinate transformation	Tilting the working plane, PLANE function	
103		Interpolation	Circular in 3 axes with tilted working plane	
104		Software option 2		○
105		3-D machining	3-D tool compensation through surface normal vectors	
106			Tool center point management (TCPM)	
107			Keeping the tool normal to the contour	
108			Tool radius compensation normal to the tool direction	
109	Interpolation	Line in 5 axes (subject to export permit)		
110		Spline: execution of splines (3rd degree polynomial)		

# Responding to Customers Anytime, Anywhere

## Doosan Machine Tools' Global Network, Responding to Customer's Needs nearby, Anytime, Anywhere

Doosan machine tools provides a system-based professional support service before and after the machine tool sale by responding quickly and efficiently to customers' demands.

By supplying spare parts, product training, field service and technical support, we can provide top class support to our customers around the world.



### Global Sales and Service Support Network

Corporations	Dealer Networks	Technical Centers Technical Center: Sales Support, Service Support, Parts Support	Service Post	Factories
4	167	51	200	3

# Doosan Machine Tools Customer Support Service

We help customers to achieve success by providing a variety of professional services from pre-sales consultancy to post-sales support.



## Supplying Parts

- Supplying a wide range of original Doosan spare parts
- Parts repair service



## Field Services

- On site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair



## Technical Support

- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy



## Training

- Programming / machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering



## Major Specifications

### NX 5500 II



Description	Unit	NX 5500 II
Max. spindle speed	r/min	20000
Spindle motor power	kW (hp)	22 / 11 (30 / 15)
Taper spindle	Taper	ISO #40 7/24
Travels (X, Y, Z)	mm (inch)	900 / 550 / 500 (35.4 / 21.7 / 19.7)
Number of tools	ea	30
Table size	mm (inch)	1000 x 550 (39.4 x 21.7)

## Doosan Machine Tools

[www.doosanmachinetools.com](http://www.doosanmachinetools.com)



### Head Office

22F T Tower, 30, Sowol-ro 2-gil, Jung-gu,  
Seoul, Korea, 04637

Tel +82-2-6972-0370 / 0350

Fax +82-2-6972-0400

### Doosan Machine Tools America

19A Chapin Rd., Pine Brook, NJ 07058, U.S.A.

Tel +1-973-618-2500

Fax +1-973-618-2501

### Doosan Machine Tools Europe

Emdener Strasse 24, D-41540 Dormagen,  
Germany

Tel +49-2133-5067-100

Fax +49-2133-5067-111

### Doosan Machine Tools India

No.82, Jakkuar Village, Yelahanka Hobli,  
Bangalore-560064

Tel + 91-80-2205-6900

E-mail [india@doosanmt.com](mailto:india@doosanmt.com)

### Doosan Machine Tools China

Room 101,201,301, Building 39 Xinzhuan  
Highway No.258 Songjiang District, China  
Shanghai(201612)


Tel +86 21-5445-1155

Fax +86 21-6405-1472

\* For more details, please contact Doosan Machine Tools.

\* The specifications and information above-mentioned may be changed without prior notice.

\* Doosan Machine Tools Co., Ltd. is a subsidiary of MBK Partners. The trademark **DOOSAN** is used under a licensing agreement with Doosan Corporation, the registered trademark holder.



**Fire Safety  
Precautions**

There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting use coolants and modifying the machine without the consent of the manufacturer. Please check the SAFETY GUIDANCE carefully before using the machine.

ver. EN 201215 SU