



Doosan Machine Tools

5-AXIS VERTICAL MACHINING CENTER

---

# DNM

**200/5AX • 350/5AX**



Basic Information

Basic Structure  
Cutting  
Performance

Detailed Information

Options  
Applications  
Diagrams  
Specifications

Customer Support Service



# DNM 5AX series

The DNM 5AX Series are high performance 5 axes vertical machining centers designed for easy operation, even for users who have no previous experience of 5 axis machining.

## Contents

### 02 Product Overview

#### Basic Information

04 Basic Structure

07 Cutting Performance

#### Detailed Information

08 Standard / Optional Specifications

10 Applications

12 Diagrams

15 Machine / NC Specifications

18 Customer Support Service



### Optimized Column and Bed Design

High feedrate and precision have been realized by optimized column and bed design with 3D simulation technique.

### Direct Coupled Spindle

Direct-coupled spindle minimized noise and vibration. High speed and heavy-duty cutting can be performed with a single setting.

### High-precision Travel System

Roller-type LM guideways and high-rigidity coupling have been adopted to ensure excellent rigidity and accuracy of the X, Y and Z linear travel system.




## Basic Structure

High feedrate and precision cutting achieved by optimized column and bed design.

## High-precision Machine Structure

High speed cutting & the highest accuracy with high precision machine structure.

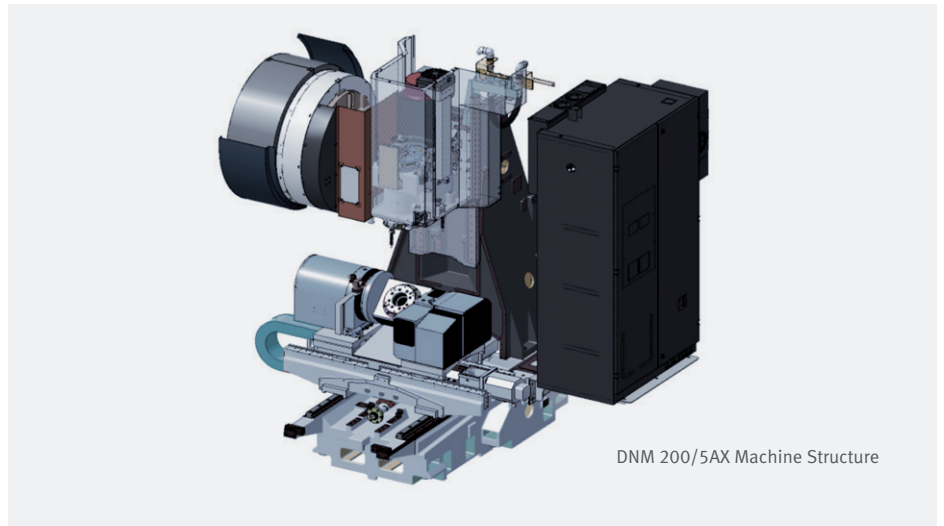

DNM 200/5AX Machine Structure




## Axis drive system

## High-precision Travel System


High rigidity and precision of the X,Y,Z axis drive systems are achieved by using roller type linear guideways and highly rigid couplings. Speed and accuracy are further enhanced with the nut cooling system which minimizes thermal error of ball screws.

(Nut cooling system : Only DNM 350/5AX)


### High Rigid Roller-type linear guideway

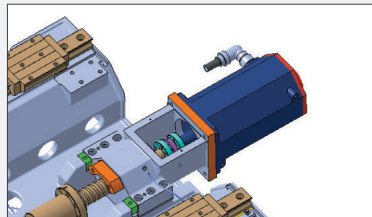

Rigidity and accuracy of feed system are improved with roller type linear guideway and coupling.

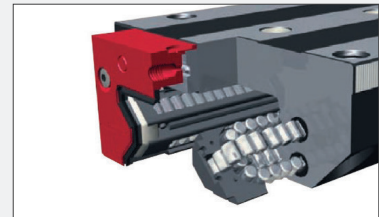

Roller type linear guideways

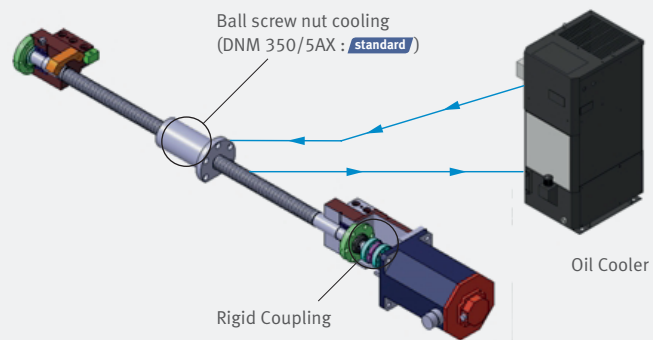


Item			X	Y	Z
DNM 200/5AX	Travels	mm (inch)	400 (+200, -200) (15.75 (+7.87, -7.87))	435 (+180, -255) (17.13 (+7.09, -10.04))	500 (19.69)
	Rapid traverse	m/min (ipm)	36 (1417.3)	36 (1417.3)	30 (1181.1)
DNM 350/5AX	Travels	mm (inch)	400 (15.75)	655 (25.79)	500 (19.69)
	Rapid traverse	m/min (ipm)	36 (1417.3)	36 (1417.3)	30 (1181.1)

## Tool Changer

Along with rapid tool change that enables higher productivity, a wide range of choices is available for tool magazines.

### Automatic Tool Changer (ATC)

Enhanced productivity achieved with the CAM-type tool changer that supports faster tool changing.

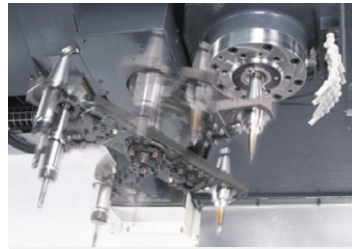

Item	Number of tools (ea)	T-T-T (s)
DNM 200/5AX	30 (40)	1.3
DNM 350/5AX	30 (40, 60)	1.3

## Rotary table

Wide machining area for various workpiece and machine set up.

### Max. Size & Weight of Work

#### DNM 200/5AX

Max. workpiece swing diameter x height

**Ø300 x 200mm (11.8 / 7.9 inch)**

Table loading capacity (A-axis 0°)

**60kg (132.3 lb)**


#### DNM 350/5AX

Max. workpiece swing diameter x height

**Ø400 x 335mm (15.7 / 13.2 inch)**

Table loading capacity


**250kg (551.1 lb)**

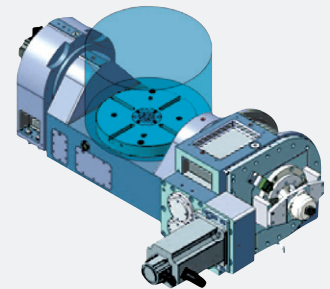

\* Actual appearance of the DNM 200/5AX rotary table may differ from the above picture.

### Rotary Table

- Applied with high-rigidity, high-precision axial and radial roller bearings
- Backlash reduced with higher structural stability
- A and C axes are hydraulically clamped for maximum rigidity

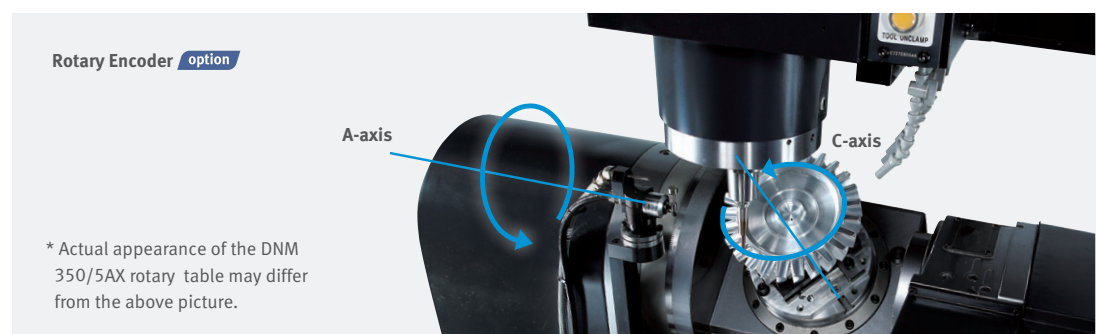

Rotary Encoder **option**

\* Actual appearance of the DNM 350/5AX rotary table may differ from the above picture.

Item		A-axis	C-axis
DNM 200/5AX	Travels (deg)	150 (+30, -120)	360
	Rapid traverse (r/min)	20	30
DNM 350/5AX	Travels (deg)	150 (+30, -120)	360
	Rapid traverse (r/min)	20	30



## Spindle

Direct-coupled spindle head minimizes noise and vibration.

### Basic Information

- Basic Structure
- Cutting Performance

### Detailed Information

- Options
- Applications
- Diagrams
- Specifications

### Customer Support Service

### Direct Coupled High Precision Spindle

Direct coupled, high precision spindles supports high speed and heavy duty cutting in a single set up. Machining performance is optimised by minimising vibration and noise, while power loss at high speed is also minimised.



Max. spindle speed

**12000r/min**


(DNM 350/5AX : 20000 r/min option)

Spindle motor power

**18.5 / 11kW**  
(24.8 / 14.8 Hp)


### Dual Contact Spindle

Tool rigidity is enhanced by firm clamping with the spindle, while tool life cycle and cut-surface roughness are improved due to reduced vibration realized by dual contact spindle.

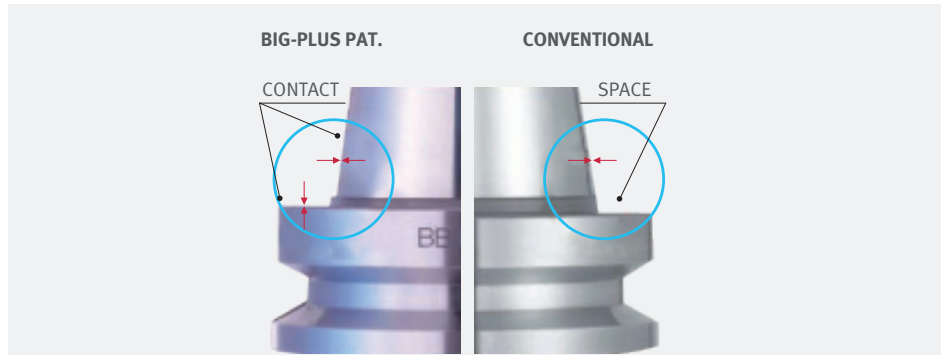

### Spindle Cooling

High-accuracy oil cooler minimizes thermal error of the spindle by removing the heat generated at the bearings and motor.

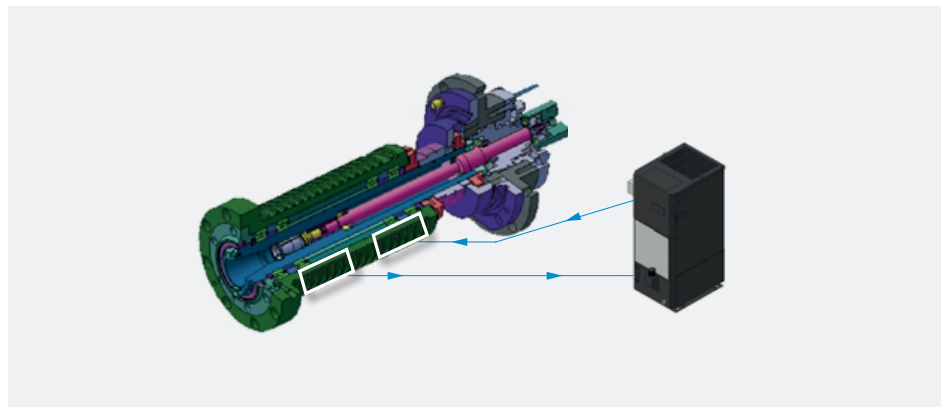



## Cutting Performance

From high-speed machining to heavy duty cutting, diverse machining processes are applicable for complex-shaped workpiece.

### DNM 200/5AX

<b>Face mill</b> Carbon steel (SM45C)			
ø80mm Face Mill (6Z)			
Machining removal rate	Spindle speed	Feed rate	
269 cm <sup>3</sup> /min (16.42 inch <sup>3</sup> )	1500 r/min	2100 mm/min (82.7 ipm)	
<b>Drill</b> Carbon steel (SM45C)			
ø32mm Drill (2Z)			
Spindle speed		Feed rate	
1200 r/min		120 mm/min (4.7 ipm)	
<b>Tap</b> Carbon steel (SM45C)			
ø73mm Drill (2Z)			
Tool		Spindle speed	
M30 x 3.5		212 r/min	

### DNM 350/5AX

<b>Face mill</b> Carbon steel (SM45C)			
ø80mm Face Mill (5Z)			
Machining removal rate	Spindle speed	Feed rate	
365 cm <sup>3</sup> /min (22.3 inch <sup>3</sup> )	1500 r/min	1900 mm/min (74.8 ipm)	
<b>Drill</b> Carbon steel (SM45C)			
ø40mm Drill (2Z)			
Spindle speed		Feed rate	
1200 r/min		180 mm/min (7.09 ipm)	
<b>Tap</b> Carbon steel (SM45C)			
ø73mm Drill (2Z)			
Tool		Spindle speed	
M30 x 3.5		212 r/min	

\* The results, indicated in this catalogue are provides as example. They may not be obtained due to differences in cutting conditions and environmental conditions during measurement.



## Standard / Optional Specifications

● Standard ○ Optional X N/A

Diverse optional features are available to meet specific customer requirements.

### Basic Information

Basic Structure  
Cutting  
Performance


### Detailed Information




Options  
Applications  
Diagrams  
Specifications


### Customer Support Service



NO.	Description	Features	DNM 200/5AX	DNM 350/5AX	
1	Air blower		○	○	
2	Air gun		○	○	
3	Automatic tool changer	30 Tools	●	●	
4		40 Tools	○	○	
5		60 Tools	X	○	
6	Automatic tool measurement	RENISHAW / TS27R- FANUC 31i-5	X	○	
7		RENISHAW / TS27R - DOOSAN-FANUC i Series	○	○	
8	Automatic workpiece measurement	NONE	●	●	
9		OMP60_RENISHAW	○	○	
10	Chip conveyor	Hinge / Scraper / Drum filter type	○	○	
11	Coolant gun		○	○	
12	Coolant Tank		●	●	
13	Easy Operation Package	Tool load monitor	●	●	
14		Alram / M-code / G-code / ATC recovery help	●	●	
15		Table moving for setup / Easy work coordinate setting	●	●	
16	Electric cabinet air conditioner		○	○	
17	Electric cabinet light		○	○	
18	Electric cabinet line filter		○	○	
19	Linear scale	X Axis	○	○	
20		Y Axis	○	○	
21		Z Axis	○	○	
22	MPG	1 MPG_PORTABLE TYPE	●	●	
23		1 MPG_PORTABLE_W/ENABLE TYPE	○	○	
24		3 MPG_PORTABLE	○	○	
25	NC System	DOOSAN FANUC i	●	●	
26		FANUC 31iB5	X	○	
27		HEIDENHAIN	X	○	
28	NC system lcd size	10.4 inch_FANUC (Color)	●	●	
29		15.1 inch_HEIDENHAIN (Color)	X	○	
30	Oil Skimmer	Belt Type	○	○	
31	Power transformer		○	○	
32	Shower coolant		○	○	
33	Spindle motor power	18.5 / 11 kW (24.8 / 14.8 Hp)	●	●	
34		22 / 18.5 kW (29.5 / 24.8 Hp)	X	○	
35		22 / 11 kW (29.5 / 14.8 Hp)	X	○	
36	Spindle speed	12000 r/min	●	●	
37		20000 r/min	X	○	
38	Test bar		○	○	
39	Through spindle coolant	NONE	●	●	
40		1.5 KW_2.0 MPA	○	○	
41		4.0 KW_2.0 MPA	○	○	
42		5.5 KW_7.0 MPA_DUAL BAG FILTER	○	○	
43	Work & tool counter	WORK / TOOL	○	○	
44	Customized Special Option	Spindle	12K DIRECT_ANALOGUE SENSOR TYPE	○	○
45			12K DIRECT_HSK63A	○	○
46			15K DIRECT_BT-DIN, DIN-DIN	○	○
47			20K_BUILT IN SPINDLE_HSK	○	○
48		60T ATC	○	○	
49		Top flushing coolant system	○	○	
50		Drum chip conveyor	○	○	
51		Axis cooling system: Nut cooling	○	○	
52		Auto door (w/Safty edge)	○	○	
53		IKC (Intelligent kinematic compensation): DCP-i	○	○	

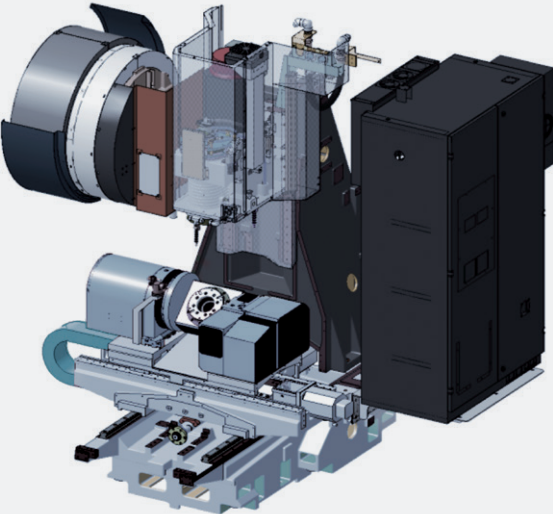




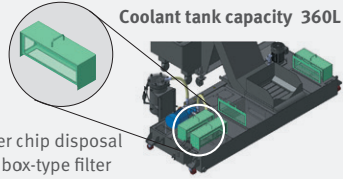
- 1. Chip conveyor option**




Hinge type      Scraper type      Drum filter type
- 2. Large capacity coolant tank built-in with chip pan and box filter**


Coolant tank capacity 360L  
Easier chip disposal with box-type filter
- 3. Shower coolant option**

- 4. Coolant system**

- 5. Auto-door type top cover**

The top cover helps enhancing convenience when loading /unloading heavy workpiece on the processing table.


- 6. Internal screw conveyor**


**Intelligent Kinematic Compensation for 5-axis**

For high accuracy 5-axis machining, Intelligent Kinematic Compensation function is recommended. This function minimizes error in complex 5-axis machining applications by maintaining tip of the tool in correct position in respect to the workpiece. In order to properly utilize this function, following four optional items are required.



**Recommended optional items**


**1. Software**

DOOSAN Rotation axis Center Point Compensation-Intelli									
RELATIVE									
X	0.000	X	0.000	X	0.000	X	0.000	X	0.000
Y	0.000	Y	0.000	Y	0.000	Y	0.000	Y	0.000
Z	0.000	Z	0.000	Z	0.000	Z	0.000	Z	0.000
D	0.000	D	0.000	D	0.000	D	0.000	D	0.000
C	0.000	C	0.000	C	0.000	C	0.000	C	0.000

TCP POSITION RECORD									
NO.	DATE	TIME	X-DIR	Y-DIR	Z-DIR				
1	2015.02.10	10:10	0.000	0.000	0.000				
2	2015.02.10	10:45	0.000	0.000	0.000				
3	2015.02.10	11:00	0.000	0.000	0.000				
4	2015.02.10	11:45	0.000	0.000	0.000				
5	2015.02.10	12:00	0.000	0.000	0.000				
6	2015.02.10	12:15	0.000	0.000	0.000				
7	2015.02.10	12:30	0.000	0.000	0.000				
8	2015.02.10	12:45	0.000	0.000	0.000				
9	2015.02.10	13:00	0.000	0.000	0.000				
10	2015.02.10	13:15	0.000	0.000	0.000				

FANUC NC: DCP-i (Developed by DOOSAN)

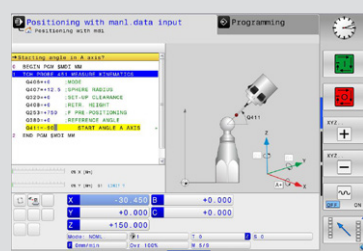

Heidenhain NC: Kinematic opt

**2. Receiver**



**3. Touch Probe**




**4. Datum ball**



**5. Automatic Tool Measurement**



**6. Master Tool**

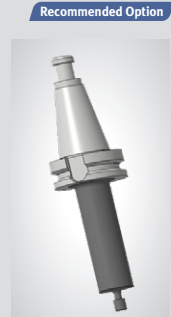

## Product Overview

## Basic Information

Basic Structure  
Cutting  
Performance

## Detailed Information

Options  
Applications  
Diagrams  
Specifications

## Customer Support Service

## DOOSAN Fanuc i Plus

DOOSAN Fanuc i Plus is optimized for maximizing customer productivity and convenience.

## 15 inch screen + New OP

DOOSAN Fanuc i Plus' operation panel enhances operating convenience by incorporating common-design buttons and layout, and features the Qwerty keyboard for fast and easy operation.



### DOOSAN Fanuc i Plus

- 15 inch color display
- Intuitive and user-friendly design

### USB & PCMCIA card QWERTY keyboard

- EZ-guide i standard
- Ergonomic operator panel
- 2MB Memory
- Hot key

## iHMI Touch screen option

iHMI provides an intuitive interface that utilizes a touch screen for quick and easy operation and provides a variety of applications that can help machine operation.



### • PLANNING

Tool information such as tool offset and tool life can be checked and set, and scheduler function is provided.

### • MACHINING

MDI, EDIT, MEM, JOG screen can be changed by using touch function, and it is quick and easy to move to sub menu by using soft key.

### • IMPROVEMENT

User can set up to record data for analysis and monitor the specific signals by setting up the maintenance and inspection function. Also user can add items.


### • UTILITY

View and search PDF and TEXT files, create notes from text / images / drawings, and link to web pages. For users who are familiar with the DOOSAN Fanuc i Plus screen, the screen can be switched.

## Easy Operation Package (E.O.P)


These Doosan software packages have been customized to provide fast and easy setup of tooling, workpiece, and program. These functions minimize the idle time caused by process setup and maximize the machine's productivity.

### Adaptive Feed Control (AFC)

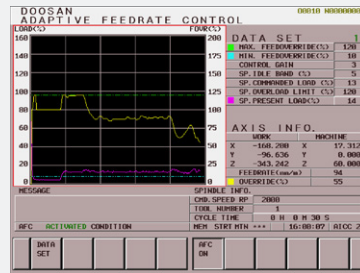


Function to control feedrate so that the cutting can be carried out at a constant load (To adapt to the spindle load set up with constant load feedrate control function)

### Tool Load Monitor

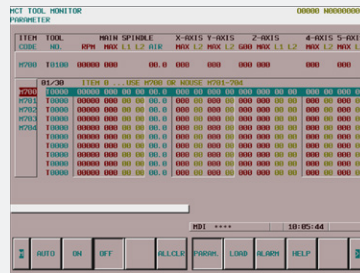


Function to automatically monitor tool load (Different loads can be set for one tool according to M700 ~ M704)

### Work Offset Setting

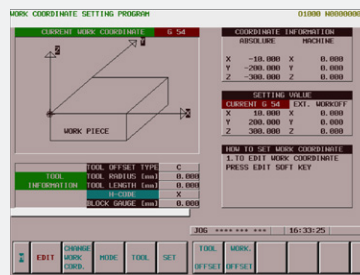


Function to configure various work offset settings

### Sensor Status Monitor

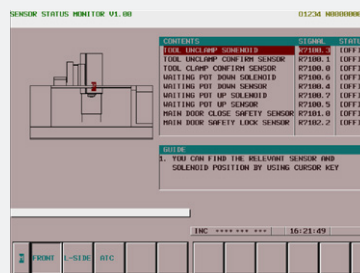

Function to view sensor conditions of the machine


### Tool Management

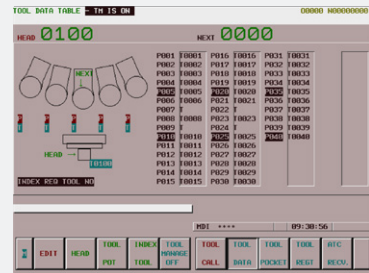

Function to manage tool information [Tool information]

- Tool No. / Tool name
- Tool condition : normal, large diameter, worn/damaged, used for the first time, manual


### Pattern Cycle & Engraving

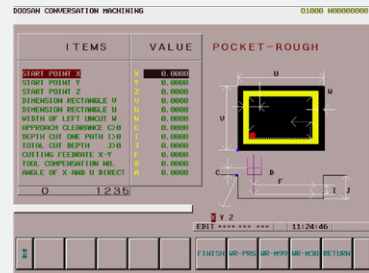

Function to create frequently-used cutting programs automatically


- Pattern Cycle: creates a program for a pre-defined shape
- Engraving: creates a shape for cutting a shape described with characters **option**

### Alarm Guidance

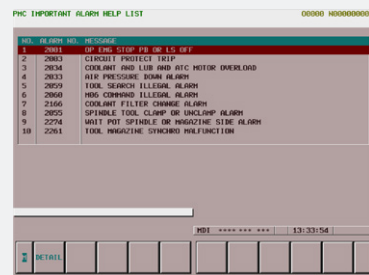

Function to show detailed info on frequently triggered alarms and recommended actions

### ATC Recovery

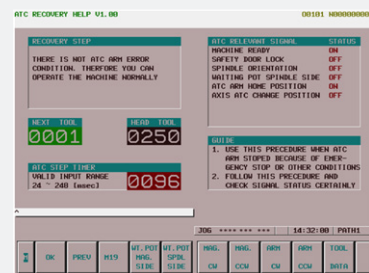

Function to view detailed info with recommended actions and to perform step-by-step operation manually (when an alarm is triggered during an ATC operation)

# Spindle

## Basic Information

- Basic Structure
- Cutting
- Performance

## Detailed Information


- Options
- Applications
- Diagrams
- Specifications

## Customer Support Service

## Spindle Power – Torque Diagram


### DNM 200/5AX & DNM 350/5AX

Max. spindle speed : 12000 r/min  
 Spindle motor power : 18.5 / 11 kW (24.8 / 14.8 Hp)

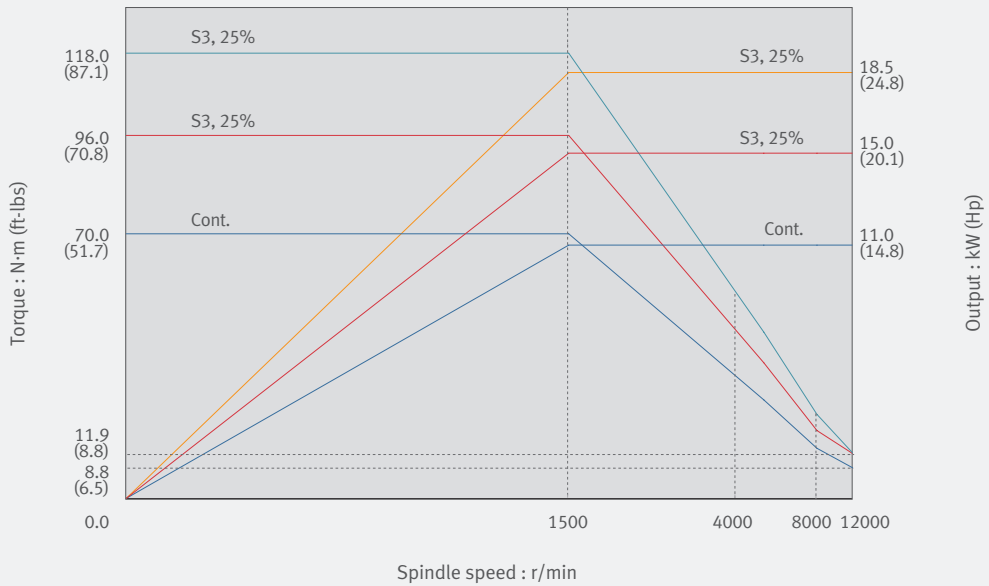

### DNM 350/5AX

Max. spindle speed : 20000 r/min **option** (Only DNM 350/5AX)  
 Spindle motor power : 22 / 11 kW (29.5 / 14.8 Hp)

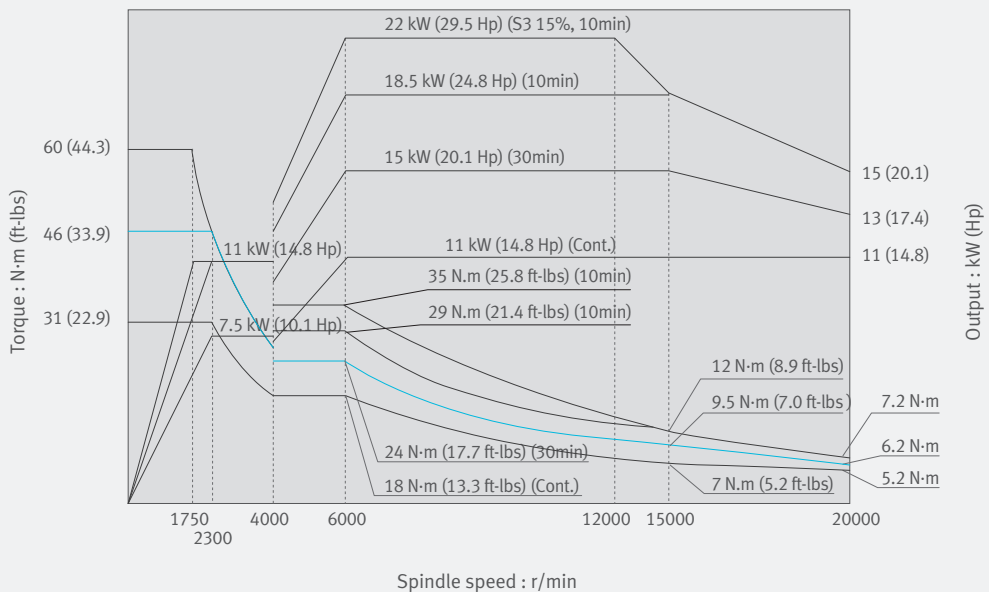


## External Dimensions


### DNM 5AX series

Unit: mm (inch)

Top View

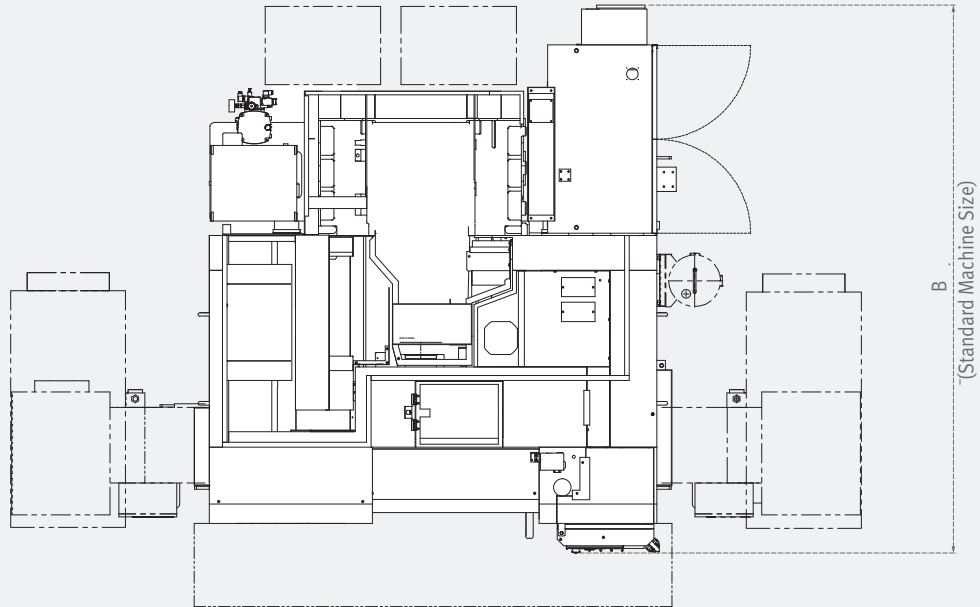

Front View

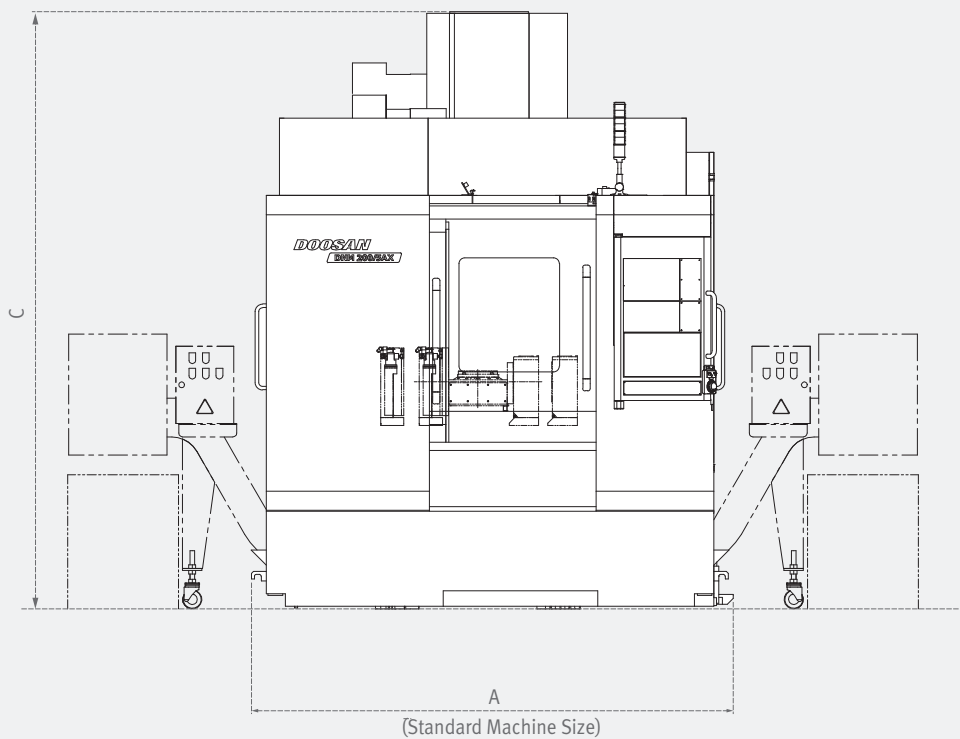

Model	A [with Chip Conveyor]	B	C
DNM 200/5AX	2490 [3447] (98.0 [135.7])	2835 (111.6)	3091 (121.7)
DNM 350/5AX	3150 [4085] (124.0 [160.8])	3209 (126.3)	3190 (125.6)

\* Some peripheral equipment can be placed in other places

Table dimension

Basic Information

- Basic Structure
- Cutting
- Performance


Detailed Information

- Options
- Applications
- Diagrams
- Specifications

Customer Support Service


DNM 200/5AX

Unit: mm (inch)

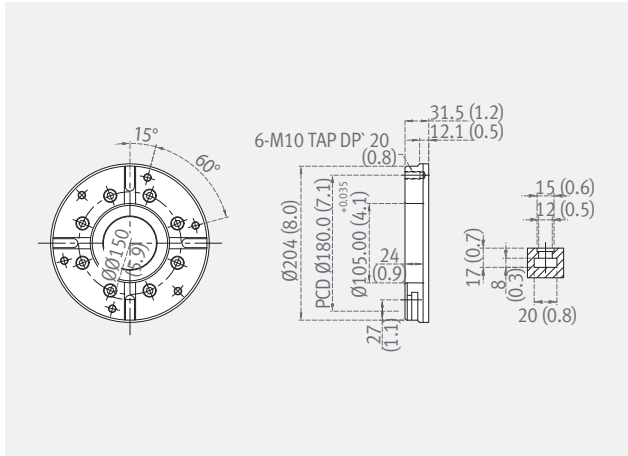

DNM 350/5AX


Unit: mm (inch)

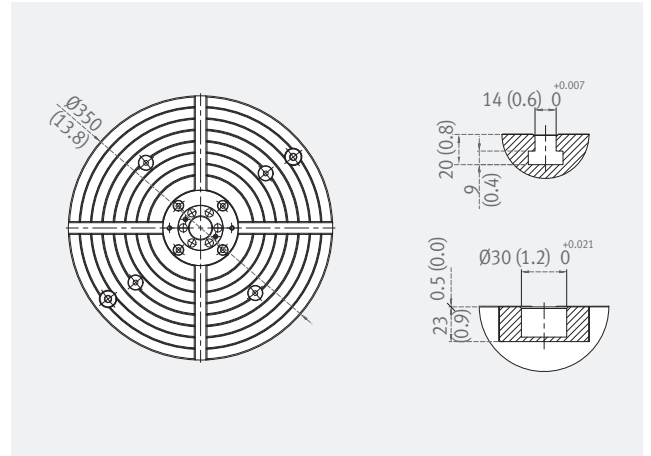

Machining Area


DNM 200/5AX

Unit: mm (inch)

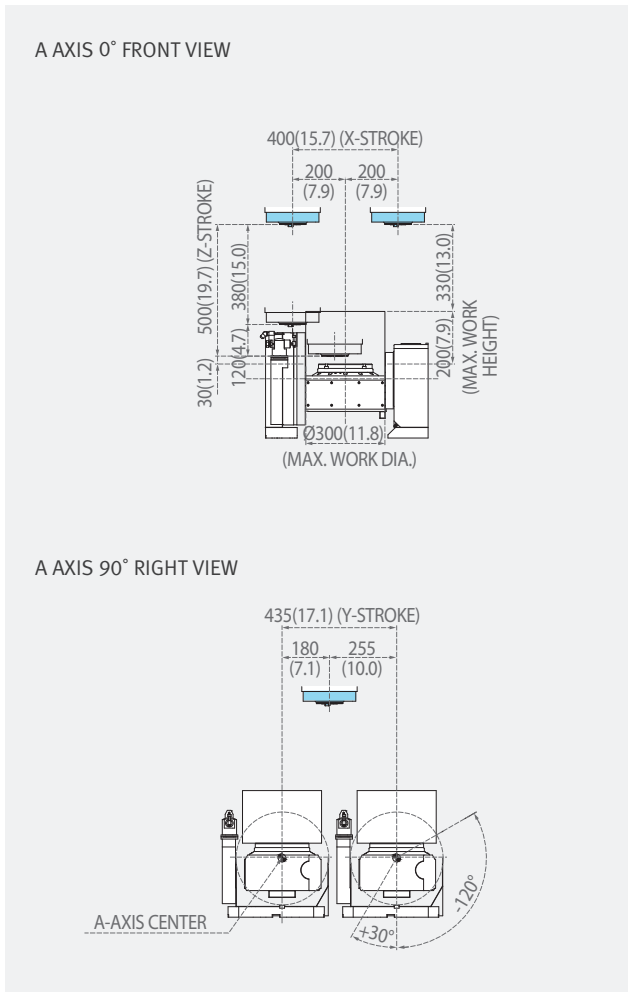

DNM 350/5AX

Unit: mm (inch)

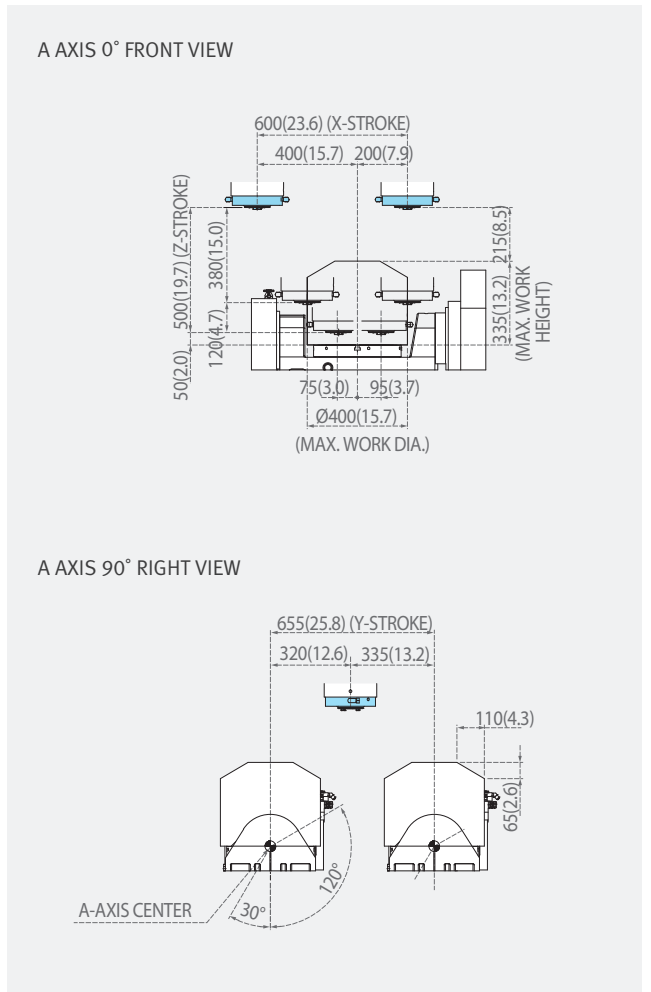

## Machine Specifications



Description		Unit	DNM 200/5AX	DNM 350/5AX	
Travel	Travel distance	X	mm (inch)	400 (15.7)	400 (15.7)
		Y	mm (inch)	435(+180, -255) (17.1 (+7.1, -10.0))	655 (25.8)
		Z	mm (inch)	500 (19.7)	
		A	deg	150 (+30 ~ -120)	
		C	deg	360	
	Distance from spindle nose to table top		mm (inch)	30 ~ 530 (1.2 ~ 20.9)	50 ~ 550 (2.0 ~ 21.7)
Feedrate	Rapid traverse rate	X	m/min (ipm)	36 (1417.3)	
		Y	m/min (ipm)	36 (1417.3)	
		Z	m/min (ipm)	30 (1181.1)	
		A	r/min	20	
		C	r/min	30	
	Cutting feedrate	X, Y, Z	m/min (ipm)	15000 (590.6)	
A, C		deg/min	7200		
Table	Table size		mm (inch)	Ø200 (7.9)	Ø350 (13.8)
	Table loading capacity		kg (lb)	40 (88.2) (Horizontal) / 60 (132.3) (Vertical)	250 (551.1)
	Table type		-	T-SLOT (12H8)	T-SLOT (14H8)
Spindle	Max. spindle speed		r/min	12000	12000 (20000)
	Spindle taper		-	ISO #40, 7/24 TAPER	
	Max. spindle torque		N·m (ft·lbs)	117 (86.3)	117 { 167 / 60 } (86.3 { 123.2 / 44.3 })
Automatic tool changer	Type of tool shank		-	MAS403 BT 40	
			-	{ CAT 40 }	
			-	{ DIN 69871-A40 }	
	Tool storage capacity		ea	30 { 40 }	30 { 40, 60 }
	Max. tool diameter (Continuous)		mm (inch)	30 Tools : 80 / 40 Tools : 76	
	Max. tool diameter (Near port empty)		mm (inch)	30 Tools : 125 / 40 Tools : 125	
	Max. tool length		mm (inch)	300 (11.8)	Ø80 : 270 / Ø125 : 210 (3.15 : 10.6 / 4.9 : 8.3)
	Max. tool weight		kg (lb)	8 (17.6)	
	Max. tool moment		N·m (ft·lbs)	5.88 (4.3)	
	Method of tool selection		-	Memory Random	
	Tool change time ( tool-to-tool )		s	1.3	
Tool change time ( chip-to-chip )		s	3.7		
Motor	Spindle motor power		kW (Hp)	18.5 / 11 (24.8 / 14.8)	18.5 / 11 (22 / 18.5 or 22 / 11) (24.8 / 14.8 (29.5 / 24.8 or 29.5 / 14.8))
	Coolant pump motor power		kW (Hp)	0.25 (0.3)	0.4 (0.5)
Power source	Electric power supply		kVA	31.3	40.6 (45.7)
	Compressed air supply		Mpa (psi)	0.54 (78.3)	
Tank capacity	Coolant pump capacity		L (gallon)	5.5 (1.5)	13 (3.4)
	Lubrication tank capacity		L (gallon)	3.1 (0.8)	
Machine size	Height		mm (inch)	3091 (121.7)	3190 (125.6)
	Length		mm (inch)	2835 (111.6)	3209 (126.3)
	Width		mm (inch)	2490 (98.0)	3150 (124.0)
	Weight		kg (lb)	5500 (4059.0)	8500 (6273.0)
Control	NC System		-	DOOSAN Fanuc i Plus	DOOSAN Fanuc i Plus / Fanuc 31i-5 / HEIDENHAIN

\*{ } : option

# NC Unit Specifications

● Standard ○ Optional X N/A

## Basic Information

Basic Structure  
Cutting  
Performance

## Detailed Information

Options  
Applications  
Diagrams  
Specifications

## Customer Support Service



No.	Division	Item	Spec.	DOOSAN Fanuc i Plus	Fanuc 31i-5
1	AXES CONTROL	Controlled axes	3 (X,Y,Z)	X,Y,Z,C,A	X,Y,Z,C,A
2		Additional controlled axes	5 axes in total	●	●
3		Least command increment	0.001 mm / 0.0001"	●	●
4		Least input increment	0.001 mm / 0.0001"	○	●
5		Interpolation type pitch error compensation		●	○
6		2nd reference point return	G30	●	●
7		3rd / 4th reference return		●	●
8		Inverse time feed		●	○
9		Cylindrical interpolation	G07.1	●	○
10		Helical interpolation B	Only Fanuc 30i	X	○
11	INTERPOLATION & FEED FUNCTION	Smooth interpolation		X	○
12		NURBS interpolation		X	○
13		Involute interpolation		X	○
14		Helical involute interpolation		X	○
15		Bell-type acceleration/deceleration before look ahead interpolation		●	●
16		Smooth backlash compensation		○	●
17		Automatic corner override	G62	●	○
18		Manual handle feed	Max. 3unit	1 unit	1 unit
19		Manual handle feed rate	x1, x10, x100 (per pulse)	●	●
20		Handle interruption		○	○
21		Manual handle retrace		○	○
22		Manual handle feed 2/3 unit		X	○
23		Nano smoothing	AI contour control II is required.	X	●
24		AICC II	200 BLOCK	●	●
25		AICC II	400 BLOCK	X	○
26		High-speed processing	600 BLOCK	X	○
27		Look-ahead blocks expansion	1000 BLOCK	X	○
28		DSQ I	AICC II (200block) + Machining condition selection function	X	●
29		DSQ II	AICC II (200block) + Machining condition selection function + Data server(1GB)	X	○
30		DSQ III	AICC II with high speed processing (600block) + Machining condition selection function + Data server (1GB)	X	○
31	Fine Surface Machining	Look-ahead block no. is Max. 200 - AI contour control II+ - Smooth tolerance control+ - Jerk control	●	X	
32	SPINDLE & M-CODE FUNCTION	M- code function		●	●
33		Retraction for rigid tapping		●	●
34		Rigid tapping	G84, G74	●	●
35	TOOL FUNCTION	Number of tool offsets	64 ea	X	64 ea
36			99 / 200 ea	X	○
37			400 ea	400 ea	○
38			499 / 999 / 2000 ea	X	○
39		Tool nose radius compensation	G40, G41, G42	●	●
40		Tool length compensation	G43, G44, G49	●	●
41		Tool life management		●	●
42		Addition of tool pairs for tool life management		●	○
43		Tool offset	G45 - G48	●	○
44		Custom macro		●	●
45	Macro executor		●	●	
46	Extended part program editing		●	●	
46	PROGRAMMING & EDITING FUNCTION	Part program storage	256KB( 640m)	X	640 m
47			512KB (1,280m)	X	○
48			1MB (2,560m)	X	○
49			2MB (5,120m)	5120 m	○
50			4MB (1,0240m)	X	○
51			8MB (2,0480m)	X	○
52		Inch/metric conversion	G20 / G21	●	●
53			400 ea	X	-
54	Number of Registered programs		500 ea	X	500 ea
55			1000 ea	○	○
56			4000 ea	X	○
57		Optional block skip	9 BLOCK	●	○
58		Optional stop	M01	●	●
59		Program file name	32 characters	X	●
60		Program number	04-digits	●	X
61		Playback function		●	○
62	Addition of workpiece coordinate system		G54.1 P1 - 48 (48 pairs)	48 pairs	48 pairs
63			G54.1 P1 - 300 (300 pairs)	X	○
64	OTHERS FUNCTIONS ( Operation, setting & Display, etc )	Embedded Ethernet		●	●
65		Graphic display	Tool path drawing	●	●
66		Loadmeter display		●	●
67		Memory card interface		●	●
68		USB memory interface	Only Data Read & Write	●	●
69		Operation history display		●	●
70		DNC operation with memory card		●	●
71		Optional angle chamfering / corner R		●	●
72		Run hour and part number display		●	●
73		High speed skip function		○	○
74		Polar coordinate command	G15 / G16	●	○
75		Polar coordinate interpolation	G12.1 / G13.1	X	○
76		Programmable mirror image	G50.1 / G51.1	●	○
77		Scaling	G50, G51	●	○
78		Single direction positioning	G60	●	○
79		Pattern data input		●	○
80		MDI/ Display unit 15" color LCD		●	●
81		Machining condition selection function	10 LEVELS	● <sup>*1)</sup>	●
82		Machining quality level adjustment	3 LEVELS	○ <sup>*1)</sup>	○

\*1) If This funtion is selected, Step of Machining condition selection function is changed from 10 levels to 3 levels.



# NC Unit Specifications

● Standard ○ Optional X N/A

## HEIDENHAIN

No.	Division	Item	Spec.	TNC 640		
1	Axes	Controlled axes	3 axes / 4 axes	X		
2			5 axes	X, Y, Z, C, A		
3			Least command increment	0.0001 mm (0.0001 inch), 0.0001°	●	
4			Least input increment	0.0001 mm (0.0001 inch), 0.0001°	●	
5			Maximum commandable value	±99999.999mm (±3937 inch)	●	
6			MDI / DISPLAY unit	15.1 inch TFT color flat panel	●	
7				19 inch TFT color flat panel	○	
8			Block processing time		0.5 ms	
9			Cycle time for path interpolation	CC 61xx	3 ms	
10			Encoders	Absolute encoders	EnDat 2.2	
11	Commissioning and diagnostics	Data interfaces	Ethernet interface	●		
12			USB interface (USB 2.0)	●		
13	Machine functions	Look-ahead (Intelligent path control by calculating the path speed ahead of time)	Max. 1024 blocks.	X		
14			Max. 5000 blocks.	●		
15			ADP (Advanced Dynamic Prediction)		●	
16			HSC filters		●	
17			Switching the traverse ranges		●	
18					●	
19	User functions	Program input	According to ISO	●		
20			With smart.NC	X		
21		Position entry		Nominal positions for lines and arcs in Cartesian coordinates	●	
22				Incremental or absolute dimensions	●	
23				Display and entry in mm or inches	●	
24				Display of the handwheel path during machining with handwheel superimpositioning	●	
25			Paraxial positioning blocks	●		
26		Tool compensation		In the working plane and tool length	●	
27				Radius-compensated contour look-ahead for up to 99 blocks (M120)	●	
28		Tool table		Three-dimensional tool radius compensation	●	
29				Central storage of tool data	●	
30			Cutting-data table	Multiple tool tables with any number of tools	X	
31			Cutting data calculator	Calculation of spindle speed and feed rate based on stored tables	●	
32			Constant contouring speed	Calculation of spindle speed and	●	
33			Parallel operation	relative to the path of the tool center or to the tool's cutting edge	●	
34			MDI mode	Creation of a program while another program is being run	●	
35			Tilting the working plane with Cycle 19		●	
36			Tilting the working plane with the PLANE function		●	
37			Manual traverse in tool-axis direction	after interruption of program run	●	
38			Function TCPM	Retaining the position of tool tip when positioning tilting axes	●	
39			Rotary table machining	Programming of cylindrical contours as if in two axes	●	
40				Feed rate in distance per minute	●	
41		User functions	FK free contour programming	for workpieces not dimensioned for NC programming	●	
42				Program jumps	Subprograms and program section repeats	●
43					Calling any program as a subprogram	●
44				New 3-D simulation graphics in full detail		●
45				Program verification graphics	Plan view, view in three planes, 3-D view	●
46					3-D line graphics	●
47				Programming graphics	2-D line graphics	●
48					3-D line graphics	X
49				Program-run graphics	(plan view, view in three planes, 3-D view)	●
50				Datum tables	Saving of workpiece-specific datums	●
51			Preset table	Saving of reference points	●	
52			Freely definable table	after interruption of program run	●	
53			Returning to the contour	With mid-program startup	●	
54				After program interruption (with the GOTO key)	●	
55			Autostart		●	
56			Actual position capture		●	
57			Enhanced file management		●	
58			Context-sensitive help for error messages		●	
59			TNCguide	Browser-based, context-sensitive helpsystem	●	
60			Calculator		●	
61			Entry of text and special characters		●	
62			Comment blocks in NC program		●	
63			"Save As" function		●	
64			Structure blocks in NC program		●	
65		Entry of feed rates	FU (feed per revolution)	●		
66			FZ (tooth feed per revolution)	●		
67			FT (time in seconds for path)	X		
68			FMAXT (only for rapid traverse pot: time in seconds for path)	X		
69	Fixed cycles	Working plane	Cycle 19	●		
70			Cylinder surface	Cycle 27	●	
71			Cylinder surface slot milling	Cycle 28	●	
72			Cylinder surface ridge milling	Cycle 29	●	
73			Cylinder surface outside contour milling	Cycle 39	●	
74	Cycles for automatic workpiece inspection	Calibrate TS		X		
75			Calibrate TS length		X	
76			Measure axis shift		X	
77	Options	Software option 1		●		
78		Rotary table machining		Programming of cylindrical contours as if in two axes		
79				Feed rate in mm/min		
80		Coordinate transformation		Tilting the working plane, PLANE function		
81				Interpolation	Circular in 3 axes with tilted working plane	
82			Software option 2		●	
83		3-D machining		3-D tool compensation through surface normal vectors		
84				Tool center point management (TCPM)		
85				Keeping the tool normal to the contour		
86				Tool radius compensation normal to the tool direction		
87	Interpolation		Line in 5 axes (subject to export permit)			
88			Spline: execution of splines (3rd degree polynomial)			
89	Python OEM Process	Execute Python applications		○		

# Responding to Customers Anytime, Anywhere

## Doosan Machine Tools' Global Network, Responding to Customer's Needs nearby, Anytime, Anywhere

Doosan machine tools provides a system-based professional support service before and after the machine tool sale by responding quickly and efficiently to customers' demands.

By supplying spare parts, product training, field service and technical support, we can provide top class support to our customers around the world.




### Global Sales and Service Support Network

Corporations	Dealer Networks	Technical Centers Technical Center: Sales Support, Service Support, Parts Support	Service Post	Factories
4	167	51	200	3

# Doosan Machine Tools Customer Support Service

We help customers to achieve success by providing a variety of professional services from pre-sales consultancy to post-sales support.

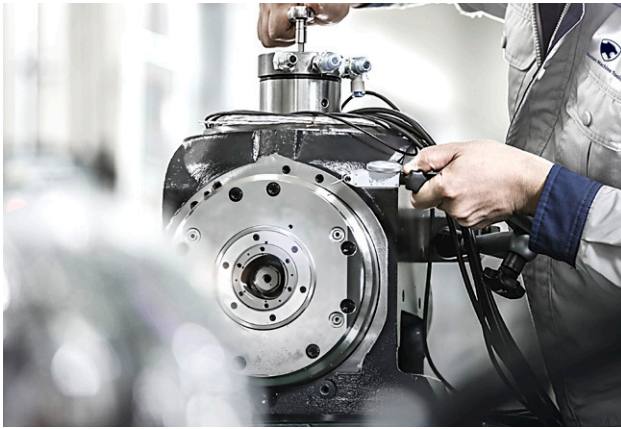

## Supplying Parts

- Supplying a wide range of original Doosan spare parts
- Parts repair service



## Field Services

- On site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair



## Technical Support

- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy



## Training

- Programming / machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering





### **Head Office**

22F T Tower, 30, Sowol-ro 2-gil  
Jung-gu, Seoul, Korea, 04637

Tel +82-2-6972-0370/0350

Fax +82-2-6972-0400

### **Doosan Machine Tools America**

19A Chapin Road, Pine Brook  
New Jersey 07058, United States

Tel: +1-973-618-2500

Fax: +1-973-618-2501

### **Doosan Machine Tools Europe**

Emdener Strasse 24, D-41540  
Dormagen, Germany

Tel: +49-2133-5067-100

Fax: +49-2133-5067-111

### **Doosan Machine Tools India**

No.82, Jakkuar Village  
Yelahanka Hobli, Bangalore-560064

Tel: + 91-80-2205-6900

E-mail: [india@doosanmt.com](mailto:india@doosanmt.com)

### **Doosan Machine Tools China**

Room 101,201,301, Building 39 Xinzhuan  
Highway No.258 Songjiang District  
China Shanghai (201612)

Tel: +86 21-5445-1155

Fax: +86 21-6405-1472

### **Sales inquiry**

[sales@doosanmt.com](mailto:sales@doosanmt.com)

\*For more details, please contact Doosan Machine Tools.

\*The specifications and information above-mentioned may be changed without prior notice.

\*Doosan Machine Tools Co., Ltd. is a subsidiary of MBK Partners. The trademark **DOOSAN** is used under a licensing agreement with Doosan Corporation, the registered trademark holder.



**Fire Safety  
Precautions**

There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting use coolants and modifying the machine without the consent of the manufacturer. Please check the SAFETY GUIDANCE carefully before using the machine.