
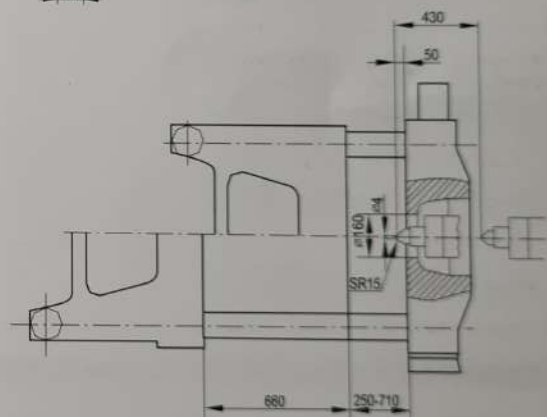



HTF360X

SPECIFIKACIJA HTF360X

		A	B	C
JEDINICA ZA UBRIZGAVANJE				
Prečnik pužnog vijka	mm		70	
Odnos	L/D		20	
Zapremina ubrizgavanja (rač.)	cm ³		1239	
Masa ubrizgavanja (PS)	g		1127	
Kapacitet ubrizgavanja (PS)	g/s		368	
Kapacitet plastificiranja (PS)	g/s		44,9	
Pritisak ubrizgavanja	MPa		180	
Broj obrtaja pužnog vijka	o/min		0-180	
JEDINICA ZA ZATVARANJE				
Sila zatvaranja	KN		3600	
Hod otvaranja	mm		660	
Razmak između vodilica	mm		710x710	
Max. visina kalupa	mm		710	
Min. visina kalupa	mm		250	
Hod izbacivača	mm		160	
Sila izbacivača	KN		110	
Broj izbacivačkih trnova	kom		13	
OSTALO				
Max. pritisak pumpe	MPa		16	
Snaga elektromotora pumpe	kw		37	
Snaga grejača cilindra	kw		24,85	
Dimenzije (DxŠxV)	m		6,9x2,1x2,5	
Masa mašine	t		15	
Kapacitet koša za granulat	kg		100	
Zapremina rezervoara za ulje	L		900	

Dimenzije ploča HTF360X

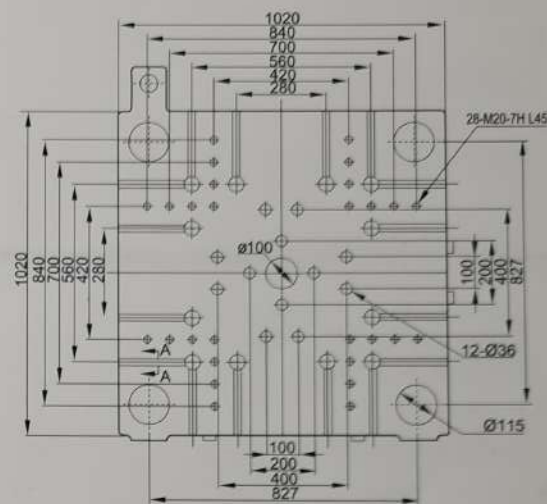

Dimenzije mašine HTF360X

